



SELLOS MECÁNICOS

GARNITURES MÉCANIQUES

RN.NU / 600 DIN

MECHANICAL SEALS

GLEITRINGDICHTUNGEN

RN.NU / 600 DIN



Sello mecánico no equilibrado, muelle simple, sentido de rotación dependiente.

Garniture mécanique non équilibrée, ressort simple, sens de rotation dépendant.

Unbalanced mechanical seal, single spring, dependent on direction of rotation.

Nicht entlastete Gleitringdichtung, einfache Feder, drehrichtungsabhängig.


TABLA DIMENSIONAL (Dimensiones en mm. sujetas a variaciones o modificaciones)

TABLEAU DIMENSIONNEL (Dimensions en mm. sujettes à variations ou modifications)

Ref.	d ₁	d ₃	d ₄	d ₆	d ₇	l _{IN}	l ₁	l ₃	l ₄	l ₅	l ₆
10	10	19.0	22	17	21	40	22	15	7	1.5	4
12	12	21.0	24	19	23	40	25	18	7	1.5	4
14	14	23.0	26	21	25	40	29	22	7	1.5	4
16	16	26.0	28	23	27	40	30	23	7	1.5	4
18	18	29.0	34	27	33	45	34	24	10	2.0	4
20	20	31.0	36	29	35	45	35	25	10	2.0	5
22	22	33.0	38	31	37	45	35	25	10	2.0	5
24	24	35.0	40	33	39	50	37	27	10	2.0	5
25	25	36.0	41	34	40	50	37	27	10	2.0	5
28	28	40.0	44	37	43	50	39	29	10	2.0	5
30	30	43.0	46	39	45	50	40	30	10	2.0	5
32	32	46.0	48	42	48	55	40	30	10	2.0	5
33	33	46.0	49	42	48	55	49	39	10	2.0	5
35	35	49.0	51	44	50	55	49	39	10	2.0	5
38	38	53.0	58	49	56	55	55	42	13	2.0	6
40	40	56.0	60	51	58	55	55	42	13	2.0	6
43	43	59.0	63	54	61	60	60	47	13	2.0	6
45	45	61.0	65	56	63	60	60	47	13	2.0	6
48	48	64.0	68	59	66	60	60	47	13	2.0	6
50	50	66.0	70	62	70	60	60	46	14	2.5	6
53	53	69.0	73	65	73	70	70	56	14	2.5	6
55	55	71.0	75	67	75	70	70	56	14	2.5	6
58	58	76.0	83	70	78	70	70	56	14	2.5	6
60	60	78.0	85	72	80	70	70	56	14	2.5	6
63	63	81.0	88	75	83	70	70	56	14	2.5	6
65	65	84.0	90	77	85	80	80	66	14	2.5	6
68	68	88.0	93	81	90	80	80	64	16	2.5	7
70	70	89.6	95	83	92	80	80	64	16	2.5	7
75	75	98.0	104	88	97	80	80	64	16	2.5	7
80	80	100.0	109	95	105	90	90	72	18	3.0	7
85	85	107.5	114	100	110	90	90	72	18	3.0	7
90	90	111.0	119	105	115	90	90	72	18	3.0	7
95	95	119.0	124	110	120	90	90	72	18	3.0	7
100	100	123.8	129	115	125	90	90	72	18	3.0	7

DIMENSIONS TABLE (Measures in mm. subject to change)

TABELLE DER ABMESSUNGEN (In mm. Abweichungen oder Änderungen vorbehalten)

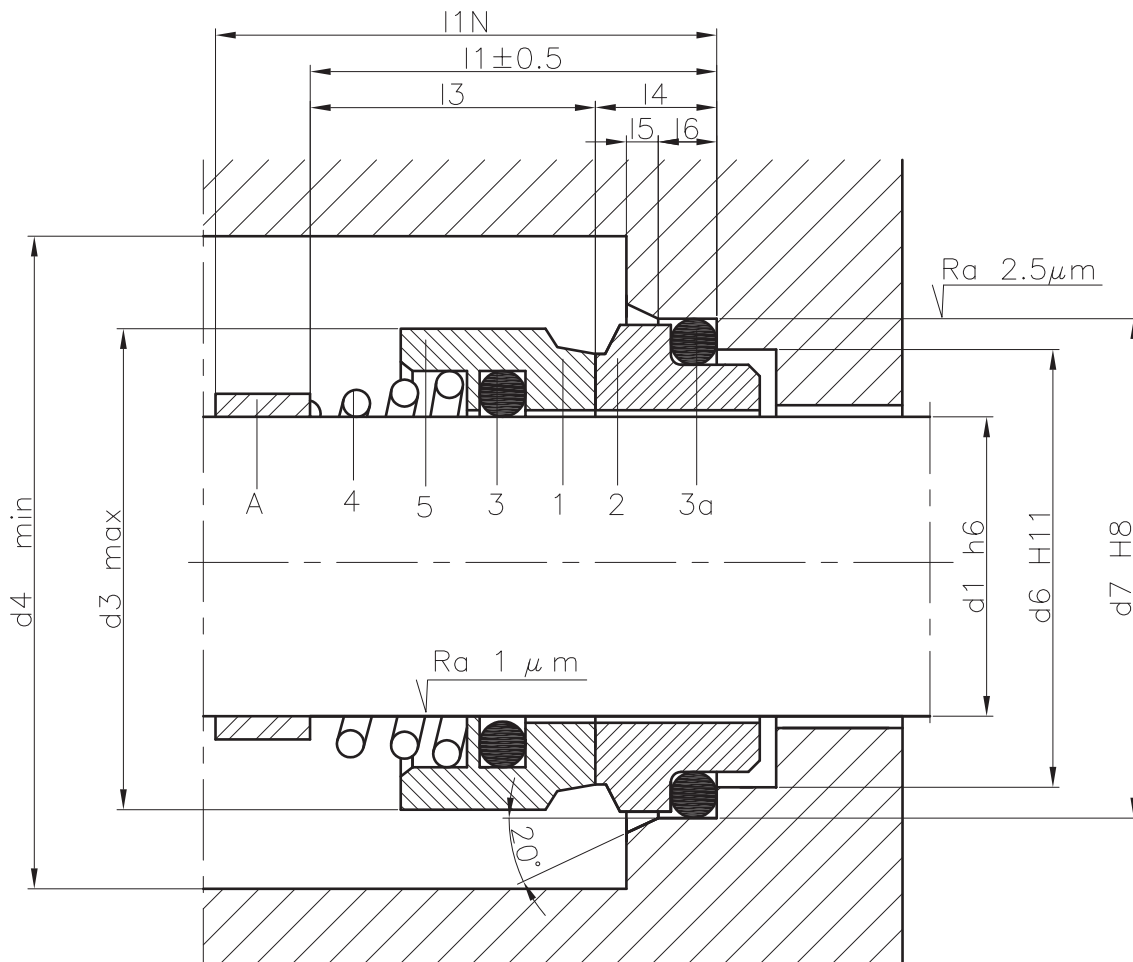

l_{1N} = dimensión longitudinal máxima admitida por la norma EN 12756 / l_{1N} = dimension longitudinale maximum admise par la norme EN 12756
 l_{1N} = corresponds to max. according to EN 12756 / l_{1N} = nach der Norm EN 12756 zulässige maximale Längsabmessung

LÍMITES OPERATIVOS / LIMITES D'UTILISATION / OPERATING LIMITS / EINSATZGRENZEN

d_1 = 10 ÷ 100 mm

p/d = 10 Kg/cm²

v/g = 20 m/s

t = -70 ÷ +200°C

Los límites operativos vienen condicionados por el factor PV
 Les limites d'utilisation ci-dessus peuvent varier en fonction du facteur PV
 The operating limits depend on the PV factor
 Die Einsatzgrenzen werden durch den DG-Faktor festgelegt

MATERIALES / MATÉRIAUX / MATERIALS / MATERIALIEN

F ₁ BEGF ₁	GBEGG	QQEGG
F ₁ BPGF ₁	GBPGG	QQPGG
F ₁ BVGF ₁	GBVGG	QQVGG
F ₁ B ₂ EGF ₁	GBTGG	UUEGF
F ₁ B ₂ PGF ₁		UUPGF
F ₁ B ₂ VGF ₁		UUVGF

Existen otras combinaciones de materiales
 Il existe d'autres combinaisons de matériaux
 Available in other materials
 Es gibt andere Materialkombinationen

COMPONENTES / CONSTRUCTION / COMPONENTS / KOMPONENTEN

- 1 Cara de roce rotante / Grain mobile / Rotative face / Rotierende Gleitfläche
- 2 Cara de roce fija / Grain stationnaire / Stationary face / Stationäre Gleitfläche
- 3 Junta tórica / Joint torique / O-ring
- 3a Junta tórica / Joint torique / O-ring
- 4 Muelle / Ressort / Spring / Feder
- 5 Armadura metálica / Corps / Metal frame / Metallgestell
- A Espaciador (no vinculado al sello) / Entretoise (non liée à la garniture) / Spacer (not included with seal) / Distanzstück (nicht mit der Dichtung verbunden)



LIDERING, S.A.

Pg. Ferrocarrils Catalans, 106-108 • 08940 Cornellà de Llobregat BARCELONA

Domestic Sales: 902 480 440

International Sales: +34 93 480 44 22

Fax 93 480 44 04



Pollensa, 2, Ofic. 8. Edif. Artemisa - Tartessos

28290 Las Rozas MADRID

Tel. 902 480 440 • Fax 91 361 40 20

LIDERING, S.A.R.L.

Parc des Aqueducs • Chemin du Favier RD 42 • 69230 Saint-Genis-Laval FRANCE

Tél. 04 72 67 02 67 • Fax 04 78 56 04 08

LIDERING, GmbH

Schiessstraße, 55 • 40549 Düsseldorf DEUTSCHLAND

Tel. 00 34 93 480 44 22 • Fax 00 34 93 480 44 04

S.A. LIDERING N.V.

BP 10 • 1410 Waterloo BELGIQUE-BELGIË

Tél. 00 34 93 480 44 22 • Fax 00 34 93 480 44 04

<http://www.lidering.com>

email: info@lidering.com