




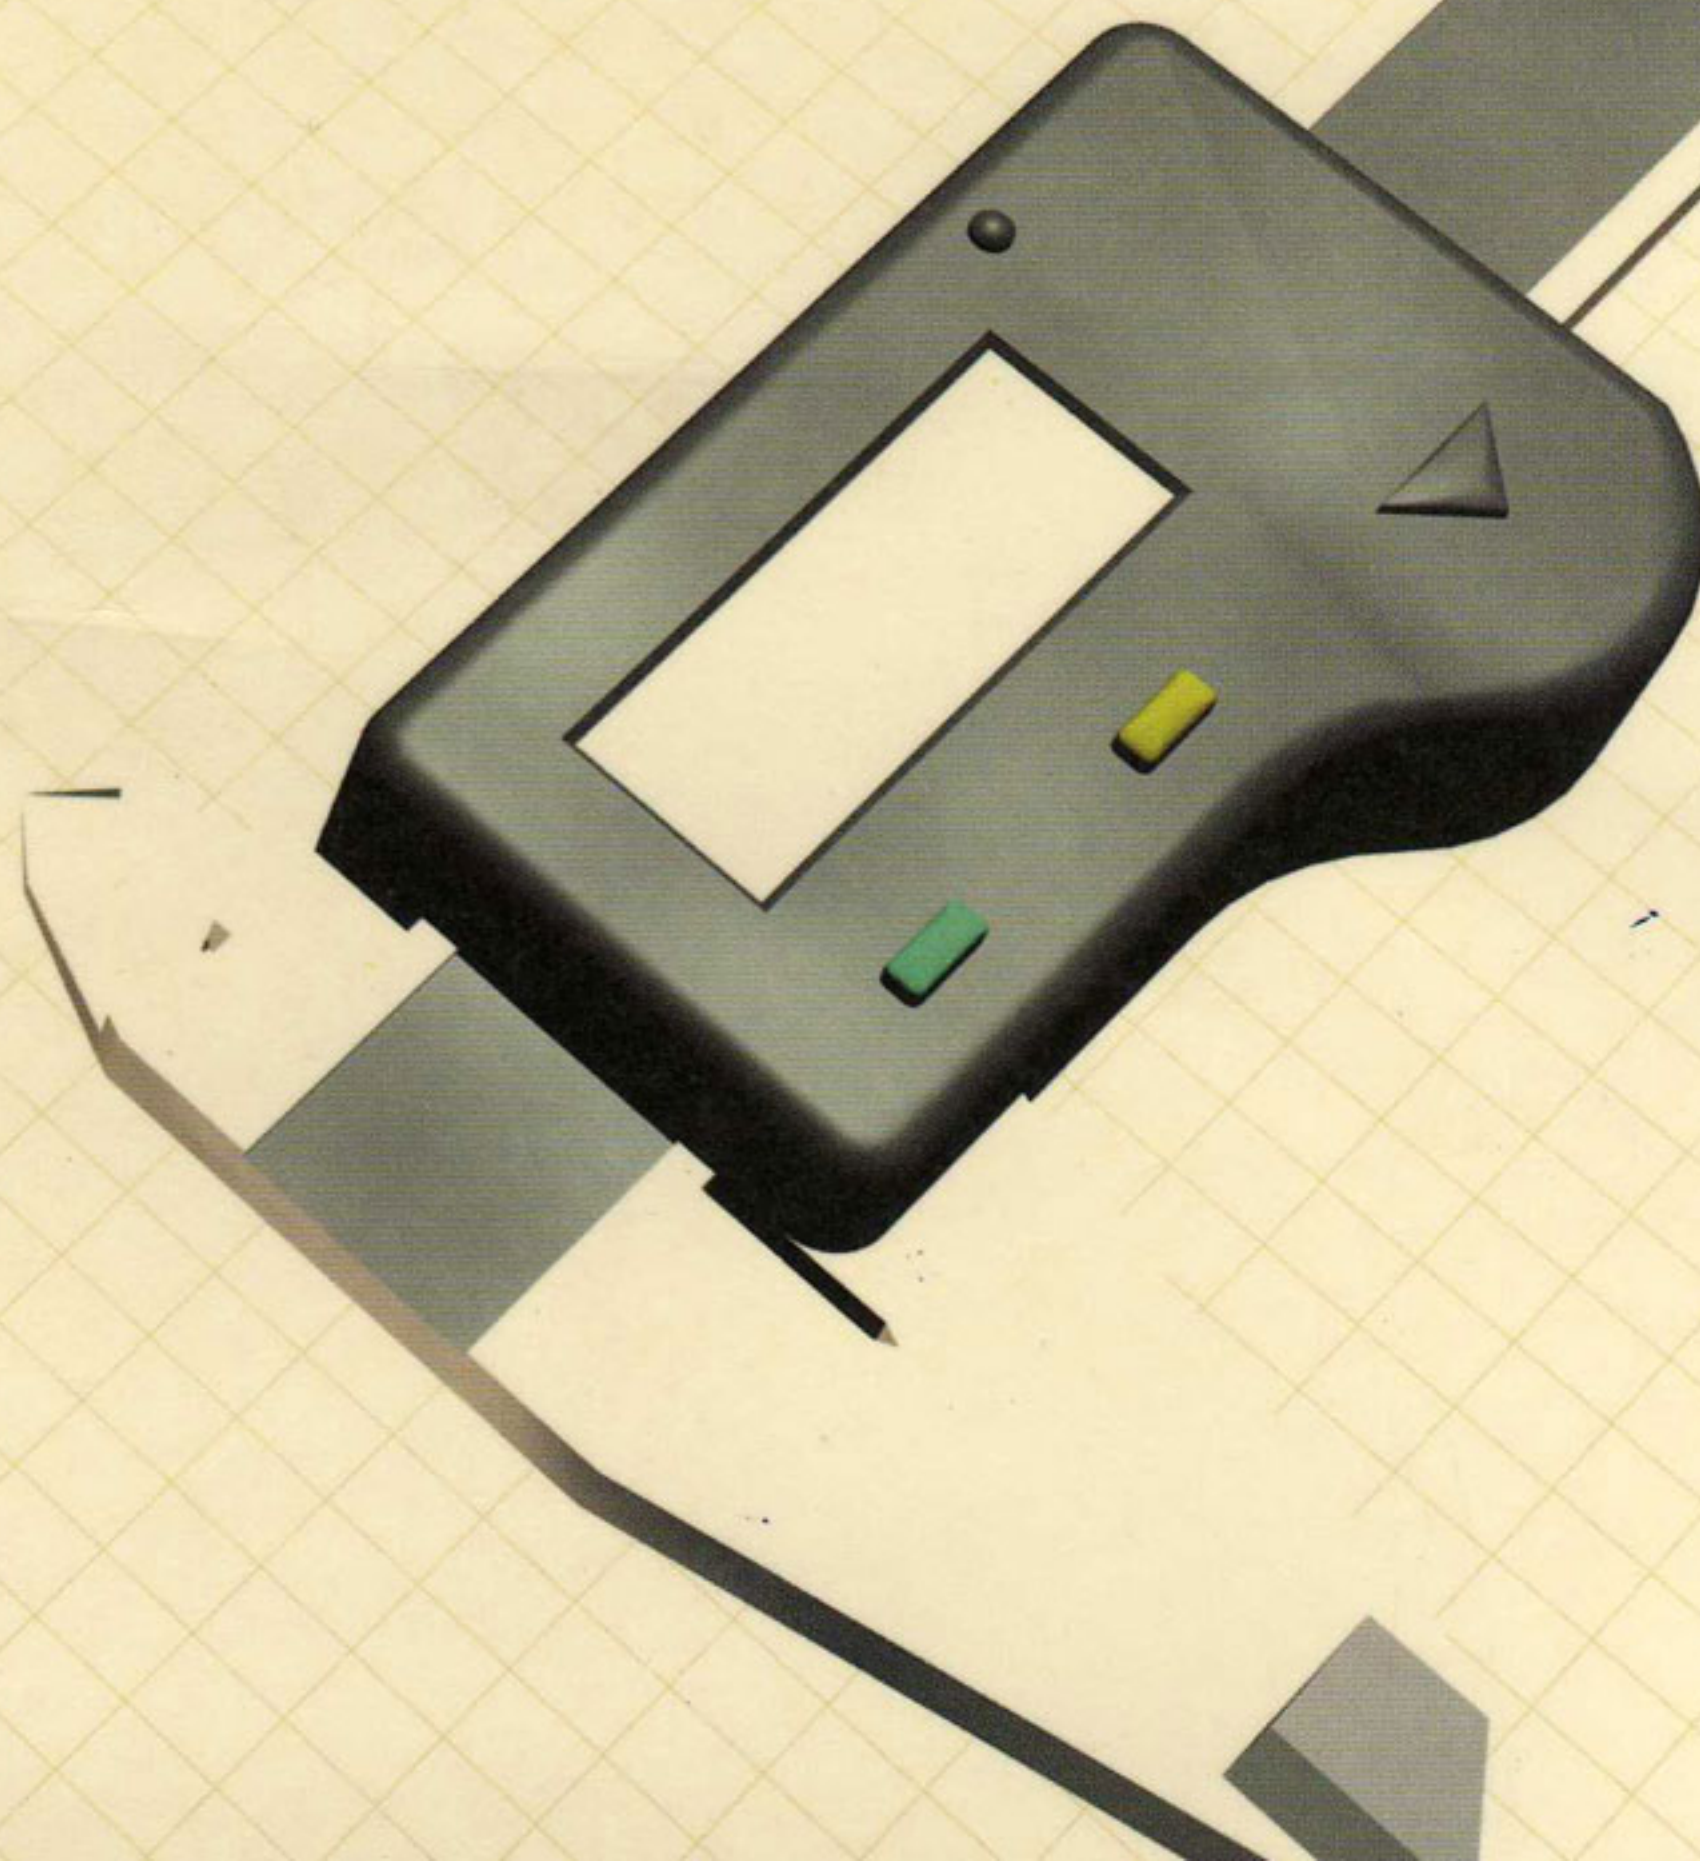



Guías A.P.M. para deslizamiento de cadena

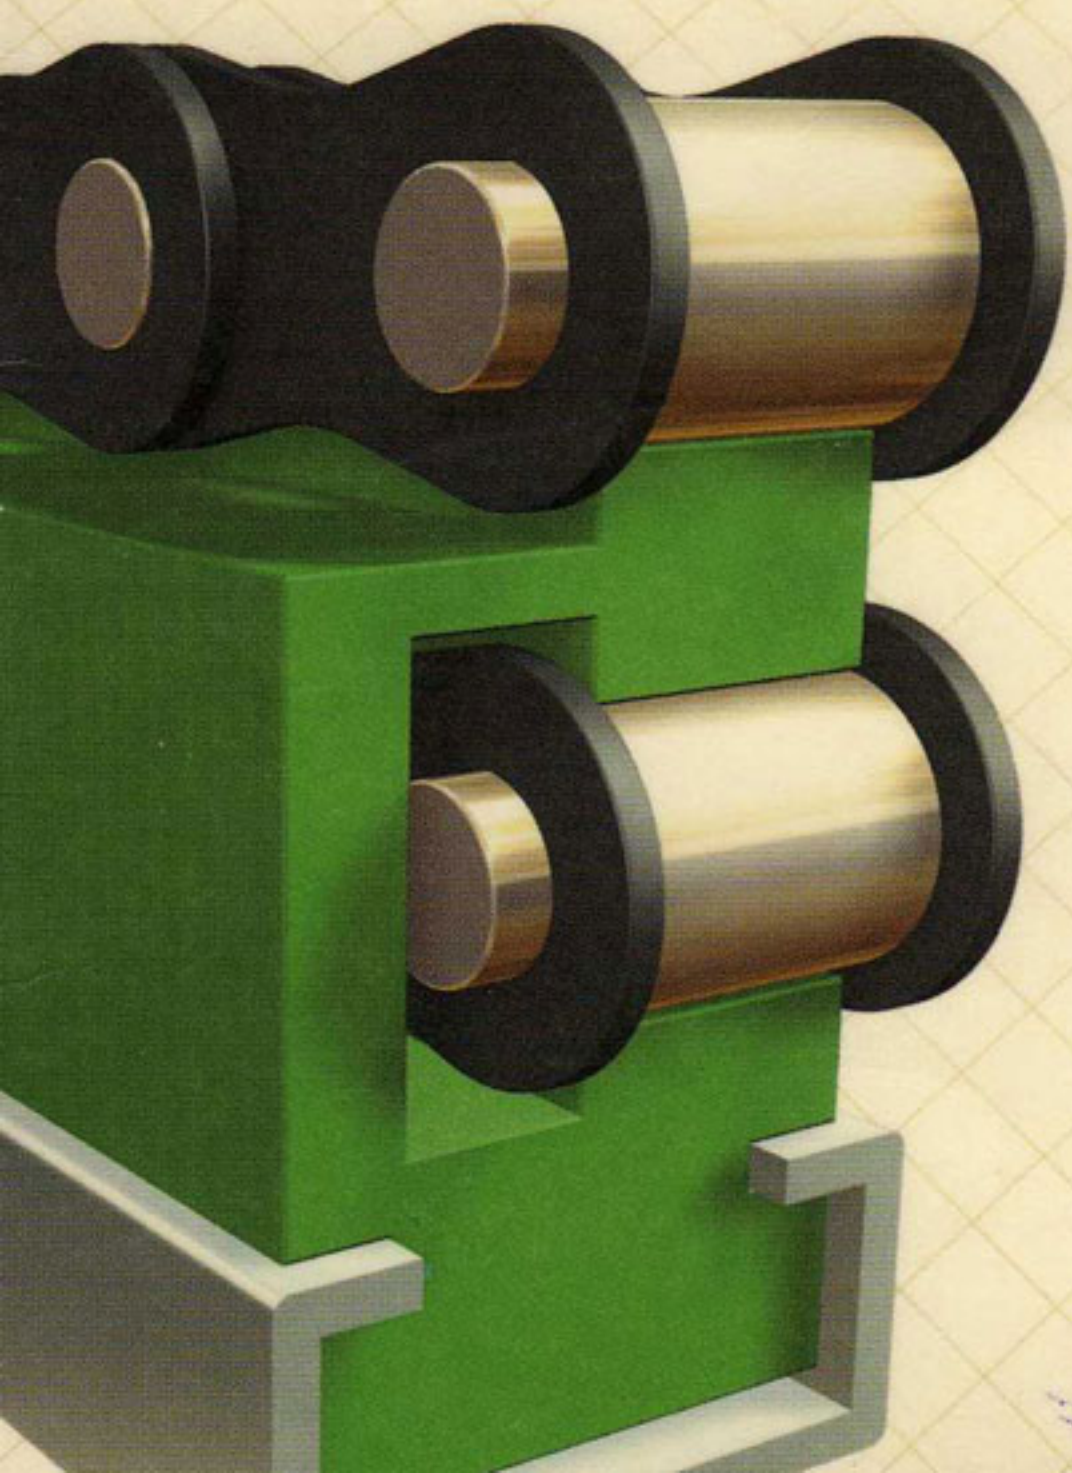

PERFIL EN "T" PARA CADENA SIMPLE


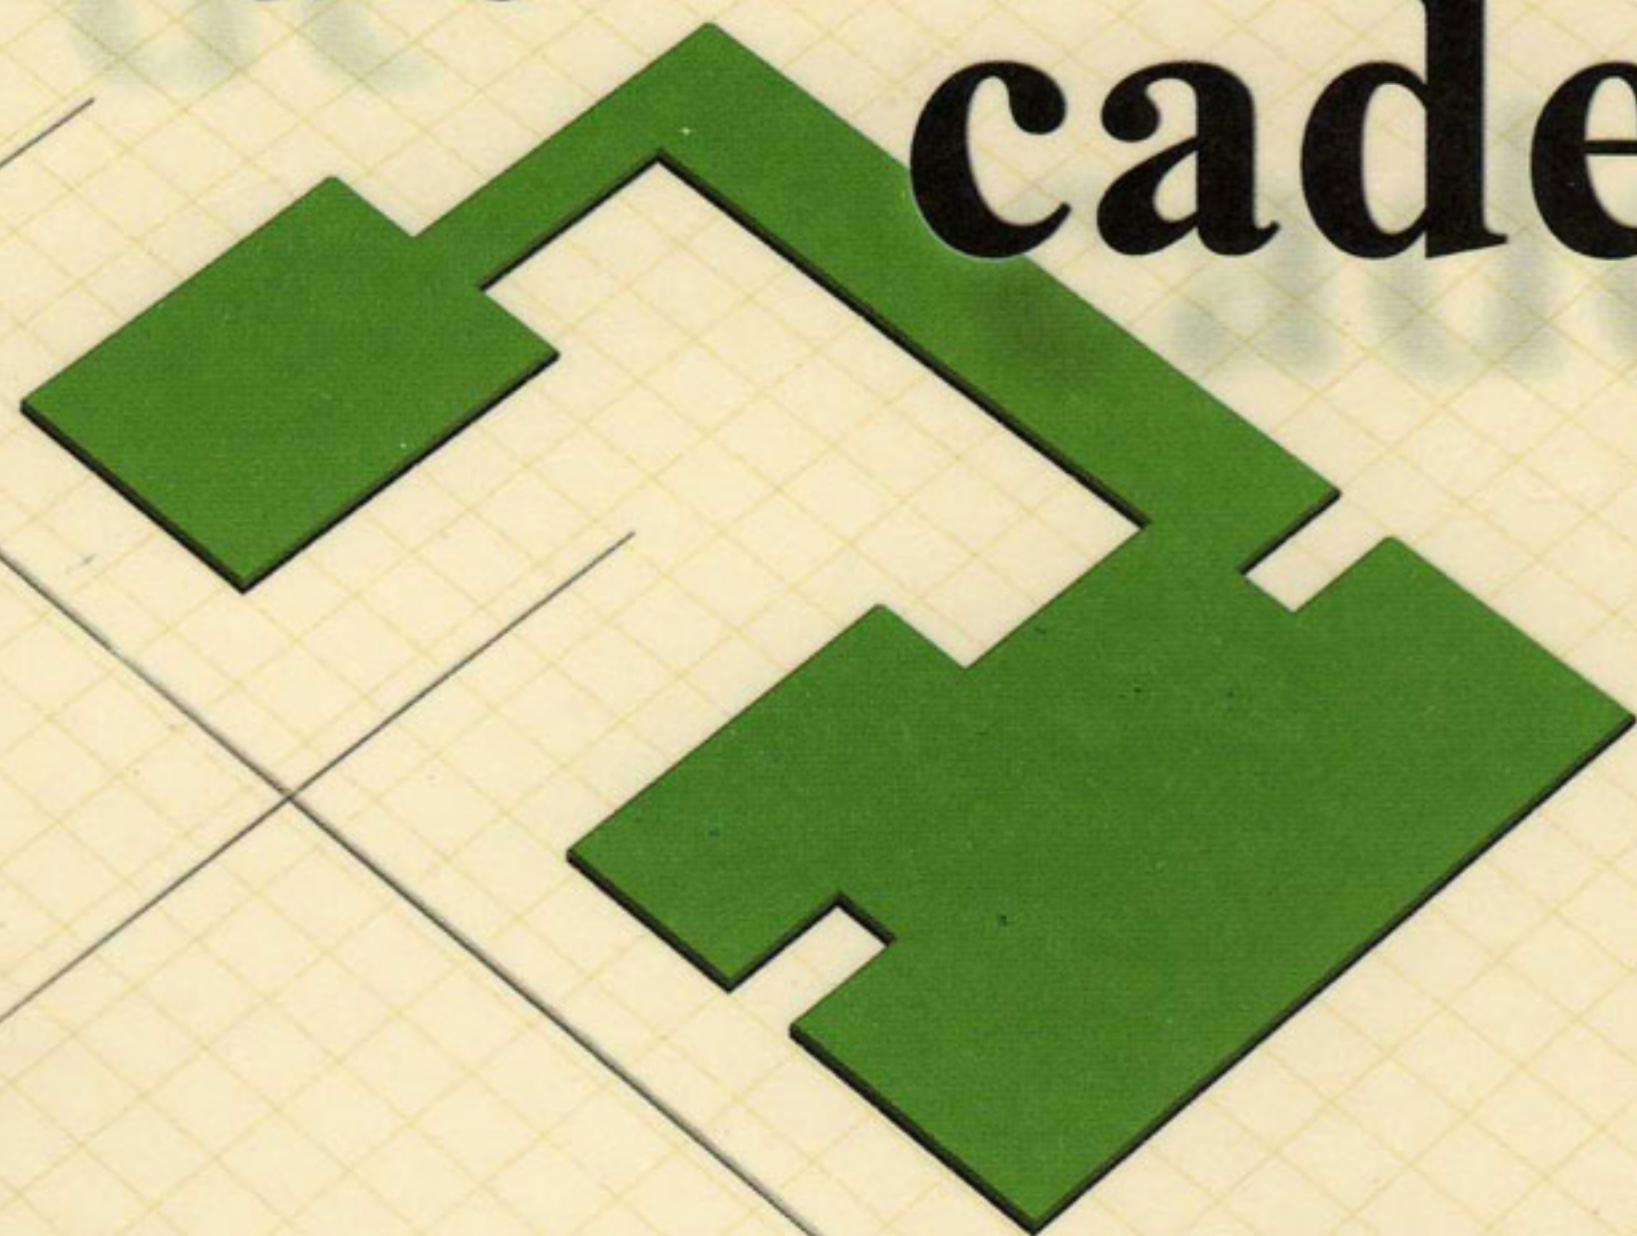


Referencia	Cadena	Tipo ISO-DIN	A	B	C	D
990000	3/8" * 7/32"	06B1	15	10	5.1	1.5
990001	1/2" * 5/16"	08B1	20	10	7.1	2.2
990002	1/2" * 5/16"	08B1	20	15	7.1	2.2
990003	1/2" * 5/16"	08B1	20	20	7.1	2.2
990004	5/8" * 3/8"	10B1	20	10	8.8	2.6
990005	5/8" * 3/8"	10B1	20	15	8.8	2.6
990006	5/8" * 3/8"	10B1	20	20	8.8	2.6
990007	3/4" * 7/16"	12B1	25	10	10.8	2.4
990008	3/4" * 7/16"	12B1	25	15	10.8	2.4
990010	3/4" * 7/16"	12B1	25	20	10.8	2.4
990011	1" * 17 mm.	16B1	40	15	16	3.5
990012	1" * 17 mm.	16B1	40	20	16	3.5
990013	1 1/4" * 3/4"	20B1	45	15	18.5	4.3
990014	1 1/4" * 3/4"	20B1	45	20	18.5	4.3
990015	1 1/2" * 1"	24B1	60	15	24.2	5.6
990017	1 3/4" * 31 mm.	28B1	75	20	29.5	6.9
990018	2" * 31 mm.	32B1	80	20	29.5	7.8

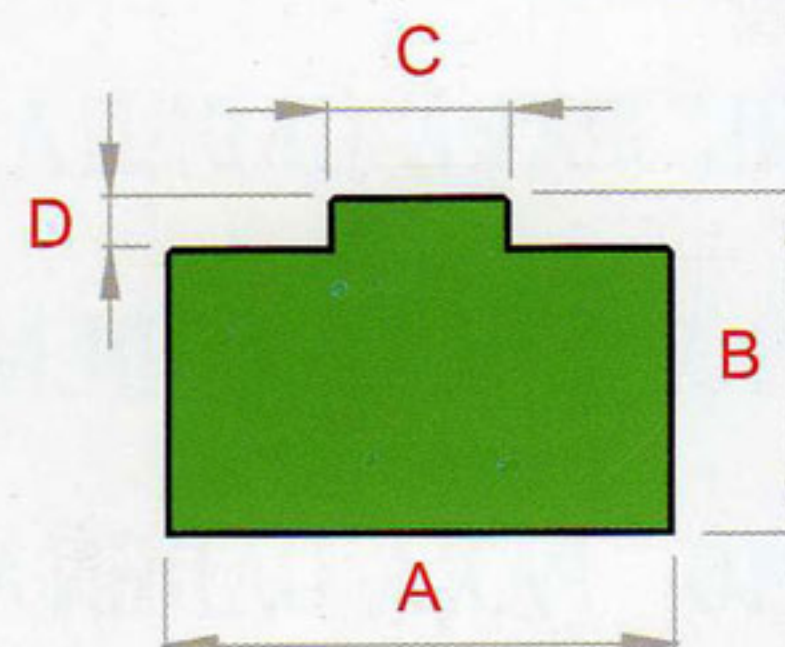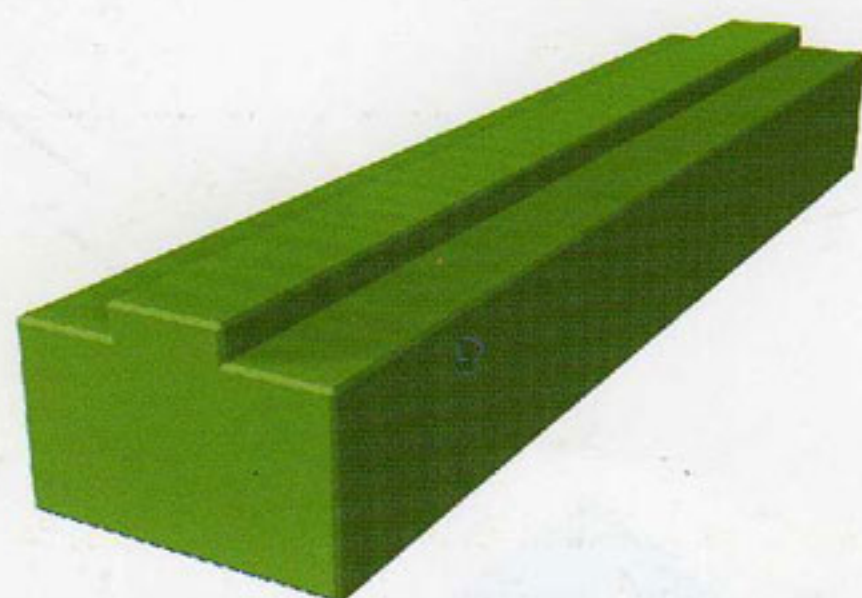

PERFIL EN "T" PARA CADENA DOBLE



Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E
990019	3/8" * 7/32"	06B2	25	10	5.4	1.5	16
990020	1/2" * 5/16"	08B2	35	10	7.4	2.2	21
990021	1/2" * 5/16"	08B2	35	15	7.4	2.2	21
990022	1/2" * 5/16"	08B2	35	20	7.4	2.2	21
990023	5/8" * 3/8"	10B2	40	10	9.2	2.6	25.8
990024	5/8" * 3/8"	10B2	40	15	9.2	2.6	25.8
990025	5/8" * 3/8"	10B2	40	20	9.2	2.6	25.8
990026	3/4" * 7/16"	12B2	45	15	11.3	2.4	30.8
990027	3/4" * 7/16"	12B2	45	20	11.3	2.4	30.8
990028	1" * 17 mm.	16B2	65	15	16.5	3.5	48
990029	1" * 17 mm.	16B2	65	20	16.5	3.5	48
990030	1 1/4" * 3/4"	20B2	55	15	19.0	4.3	54.5
990031	1 1/4" * 3/4"	20B2	55	20	19.0	4.3	54.5
990032	1 1/2" * 1"	24B2	72	20	24.6	5.6	72.0
990033	1 3/4" * 31 mm.	28B2	89	25	30.0	6.9	89.6
990034	2" * 31 mm.	32B2	89	30	30.0	7.8	88.6

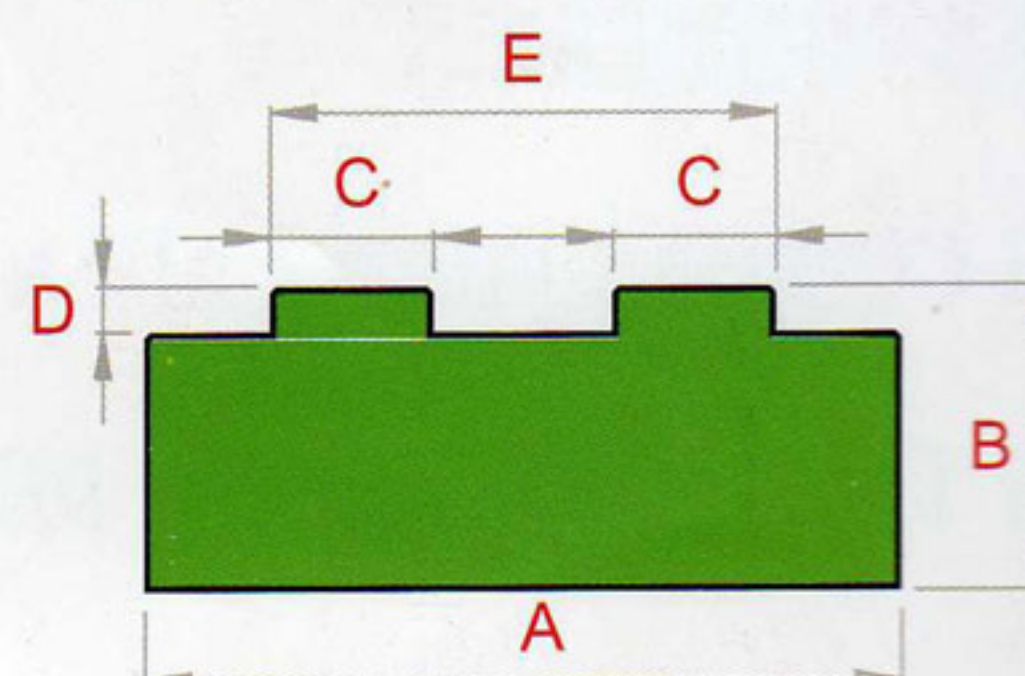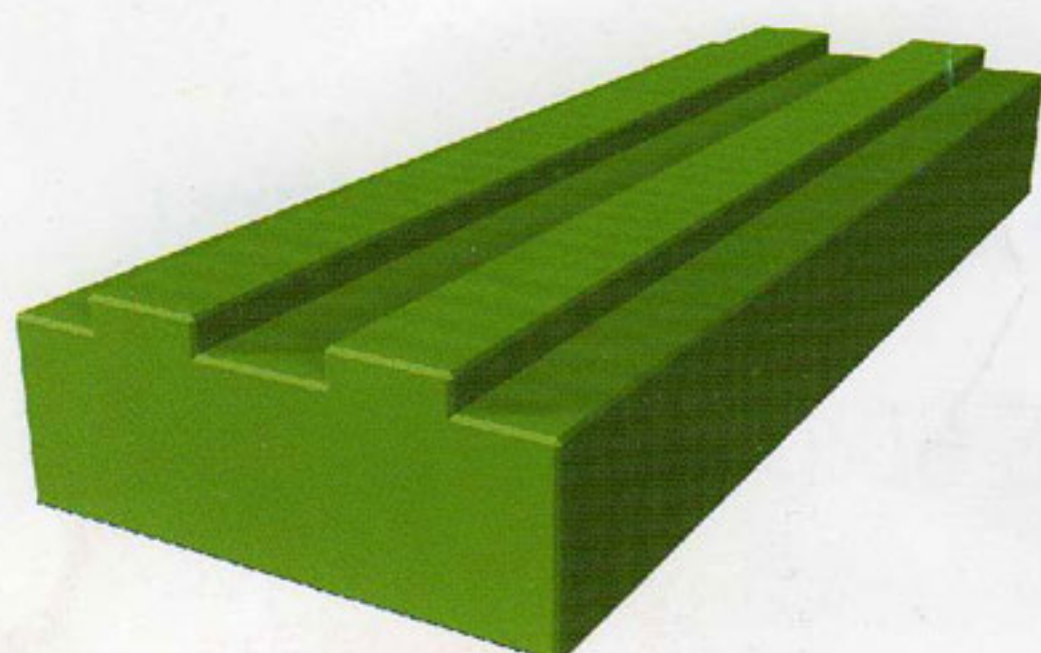

PERFIL EN "T" PARA CADENA TRIPLE





Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E
990035	3/8" * 7/32"	06B3	35	10	5.4	1.5	25.9
990036	1/2" * 5/16"	08B3	45	10	7.4	2.2	35.3
990037	1/2" * 5/16"	08B3	45	15	7.4	2.2	35.3
990038	1/2" * 5/16"	08B3	45	20	7.4	2.2	35.3
990039	5/8" * 3/8"	10B3	55	10	9.2	2.6	42.5
990040	5/8" * 3/8"	10B3	55	15	9.2	2.6	42.5
990041	5/8" * 3/8"	10B3	55	20	9.2	2.6	42.5
990042	3/4" * 7/16"	12B3	65	10	11.3	2.4	50.3
990043	3/4" * 7/16"	12B3	65	15	11.3	2.4	50.3
990044	1" * 17 mm.	16B3	95	15	16.5	3.5	80.3

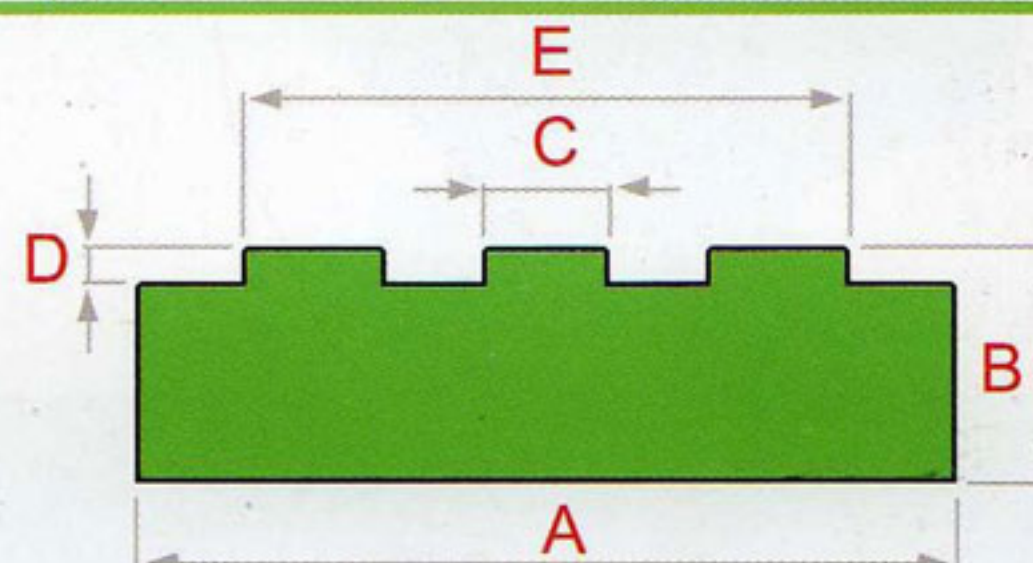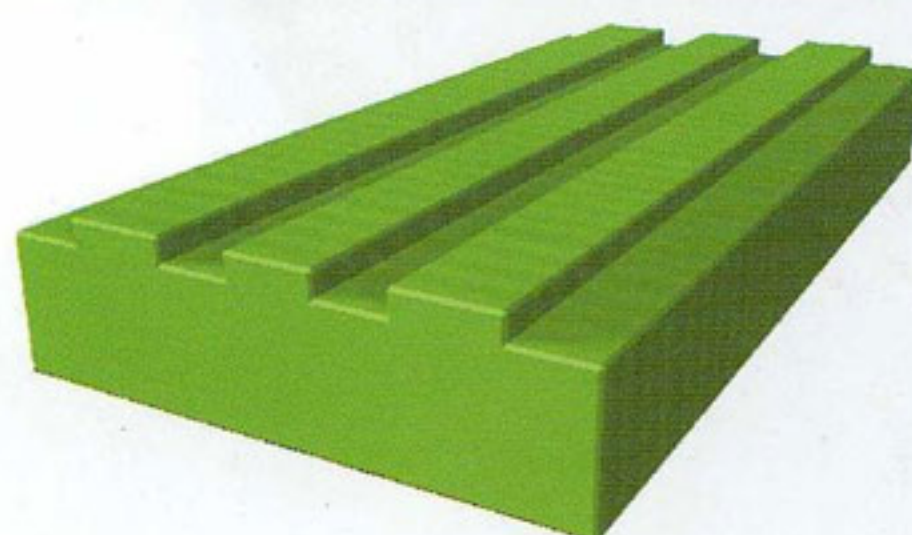



PERFIL EN "MT" PARA CADENA SIMPLE

Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	Perfil
990069	3/8" * 7/32"	06B1	20	15	5.4	1.5	17	C3
990070	1/2" * 5/16"	08B1	20	15	7.4	2.2	17	C3
990071	5/8" * 3/8"	10B1	20	15	9.2	2.6	17	C3
990072	3/4" * 7/16"	12B1	20	15	11.3	2.4	17	C3
990073	1" * 17 mm.	16B1	28	15	16.5	3.5	18	C5
990074	1 1/4" * 3/4"	20B1	38	25	19.0	4.3	30	C9

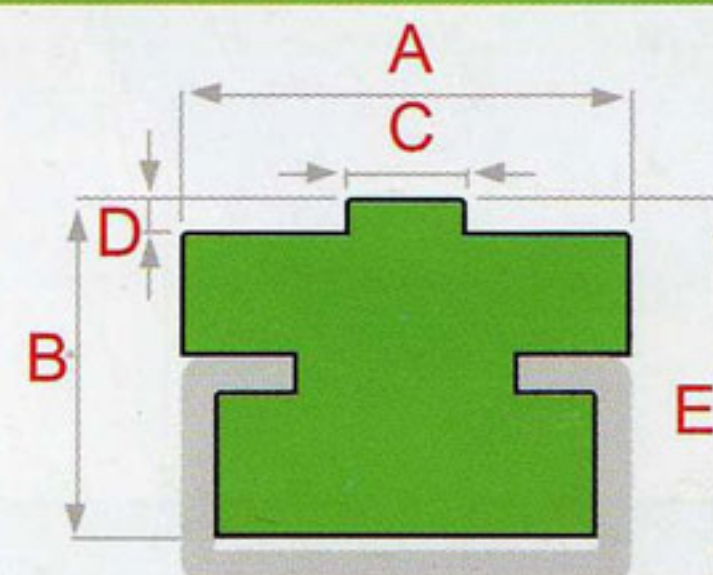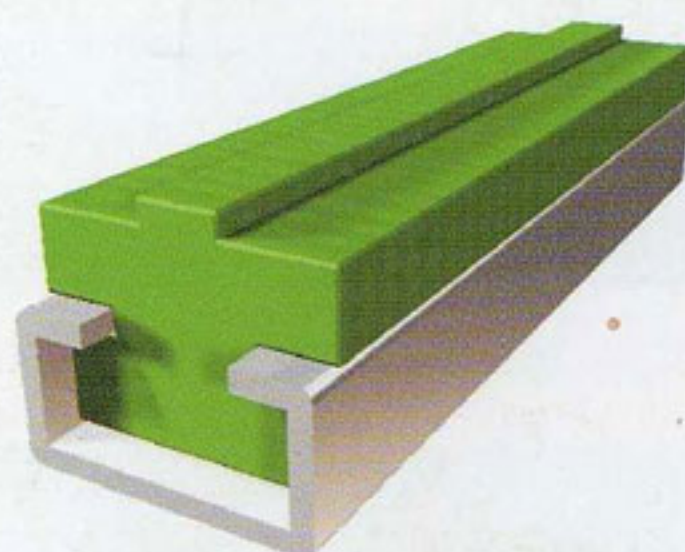

PERFIL EN "MT" PARA CADENA DOBLE



Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	Perfil
990075	3/8" * 7/32"	06B2	15.5	10	5.4	1.5	15	C3
990076	1/2" * 5/16"	08B2	21.5	10	7.4	2.2	17	C3
990077	5/8" * 3/8"	10B2	26	15	9.2	2.6	17	C5
990078	3/4" * 7/16"	12B2	30.7	15	11.3	2.4	18	C5
990079	1" * 17 mm.	16B2	48	20	16.5	3.5	27	C9

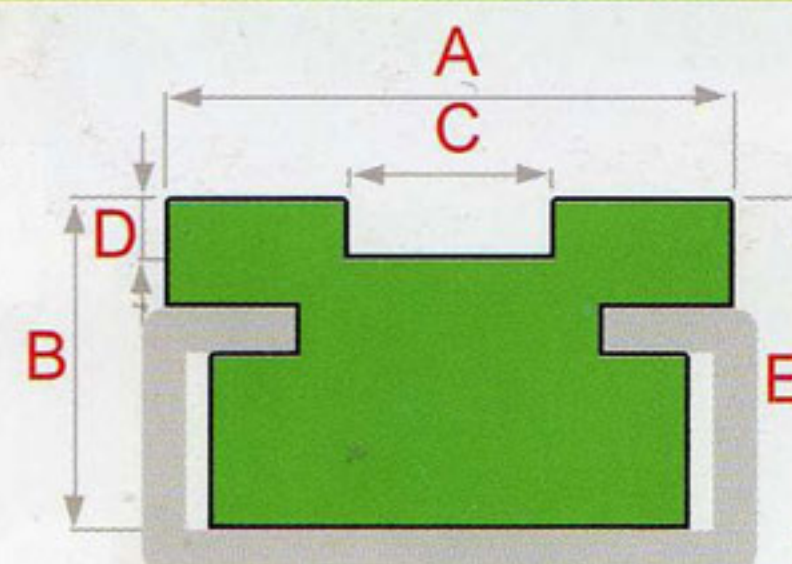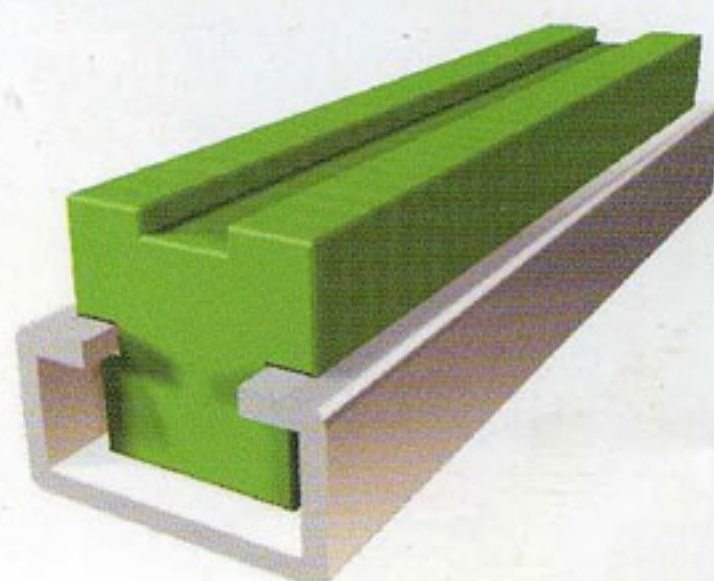

PERFIL EN "E" PARA CADENA SIMPLE





Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	F
990045	3/8" * 7/32"	06B1	25	10	5.4	1.5	15	4.4
990046	1/2" * 5/16"	08B1	30	15	7.4	2.2	20	7.2
990047	5/8" * 3/8"	10B1	33	20	9.2	2.6	23	9.5
990048	3/4" * 7/16"	12B1	38	20	11.3	2.4	28	11.1
990049	1" * 17 mm.	16B1	51	25	16.3	3.5	41	16.5

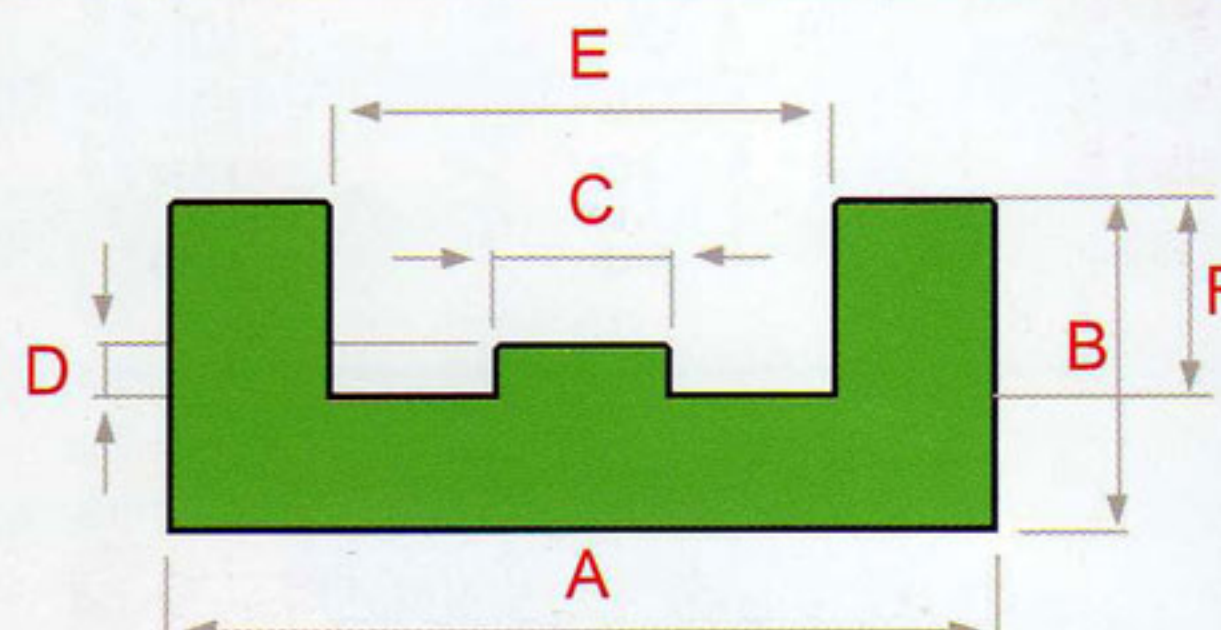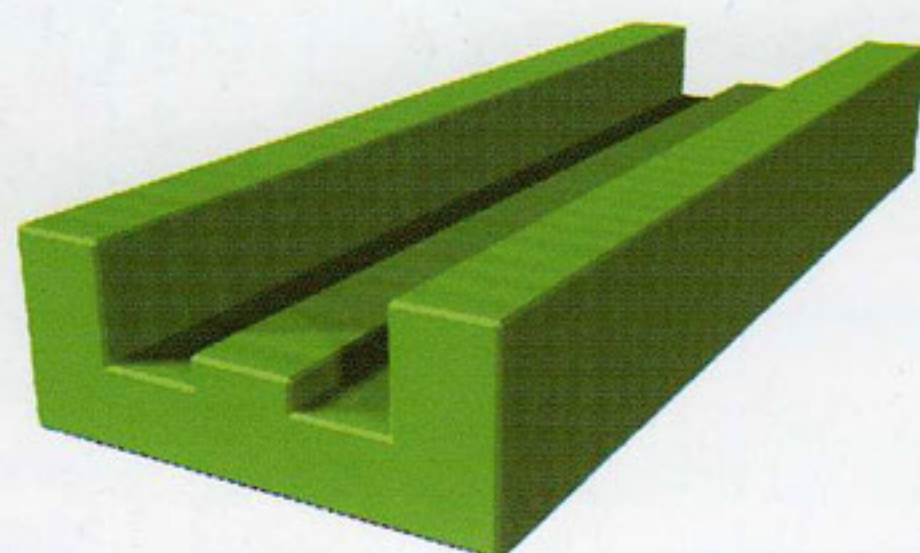



PERFIL EN "E" PARA CADENA DOBLE

Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	F
990050	3/8" * 7/32"	06B2	36	15	5.4	1.5	26	4.4
990051	1/2" * 5/16"	08B2	45	20	7.4	2.2	35	7.2
990052	5/8" * 3/8"	10B2	50	25	9.2	2.6	40	9.5
990053	3/4" * 7/16"	12B2	56	25	11.3	2.4	46	11.1
990054	1" * 17 mm.	16B2	85	30	16.3	3.5	75	16.5

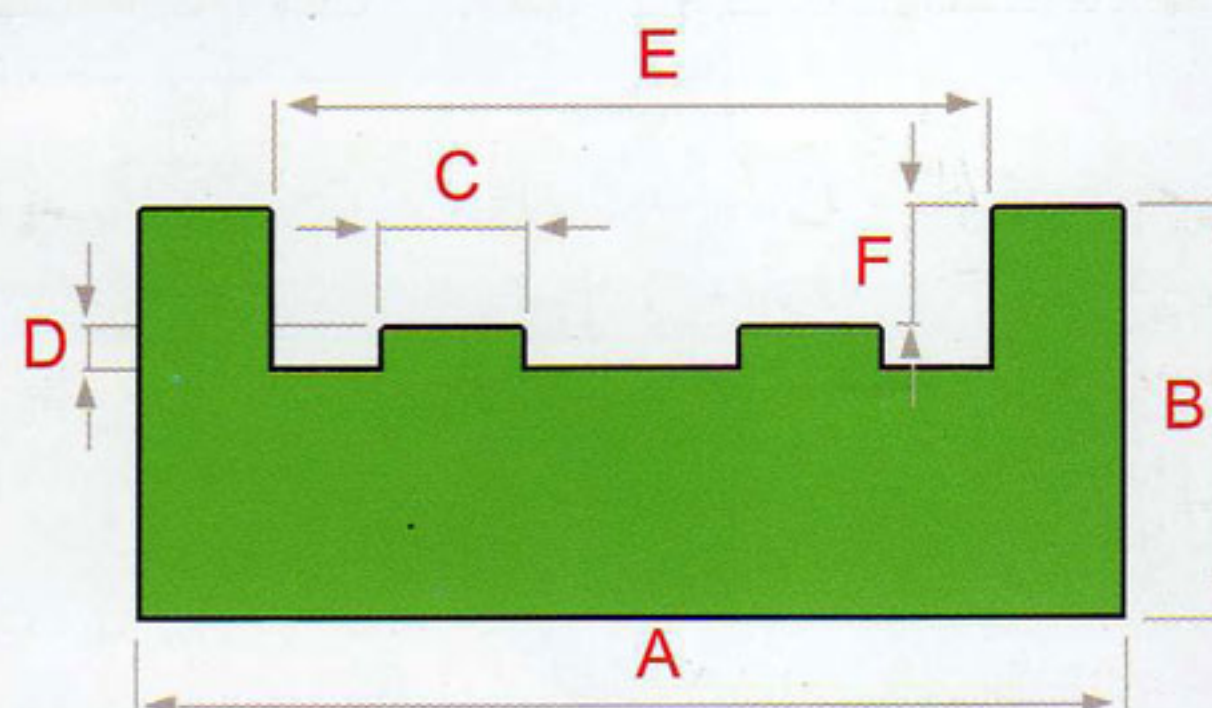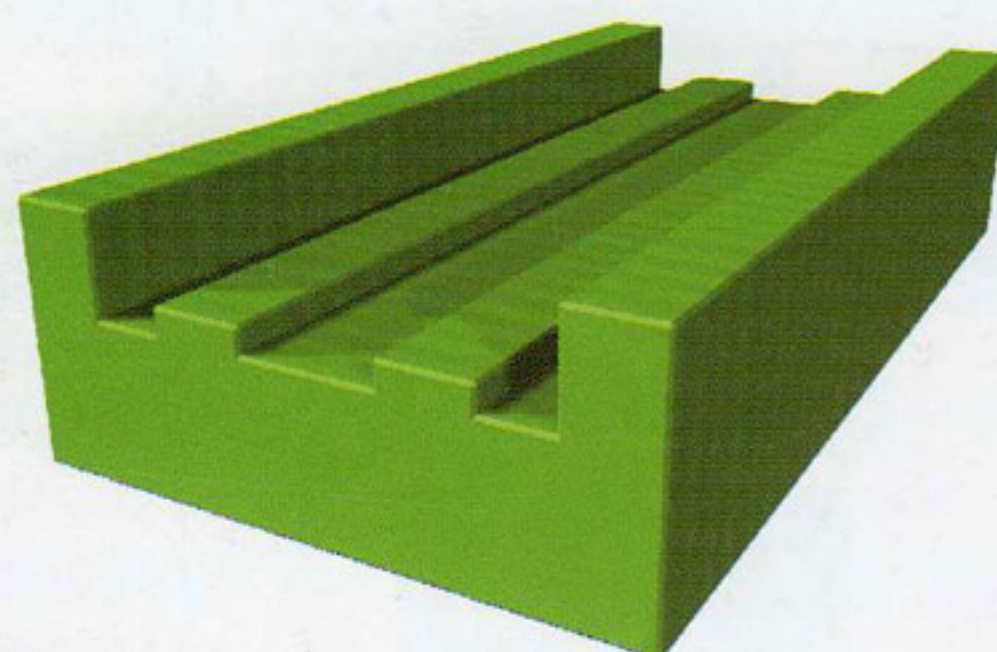

PERFIL EN "U" PARA CADENA SIMPLE



Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	F
990055	3/8" * 7/32"	06B1	20	15	2.8	4.2	9.2	4
990056	1/2" * 5/16"	08B1	25	15	3.5	4.8	12.7	5
990057	5/8" * 3/8"	10B1	25	15	3.6	5.1	15.2	6
990058	3/4" * 7/16"	12B1	25	20	3.9	5.7	16.7	7
990059	1" * 17 mm.	16B1	35	25	8.4	10	24.4	9

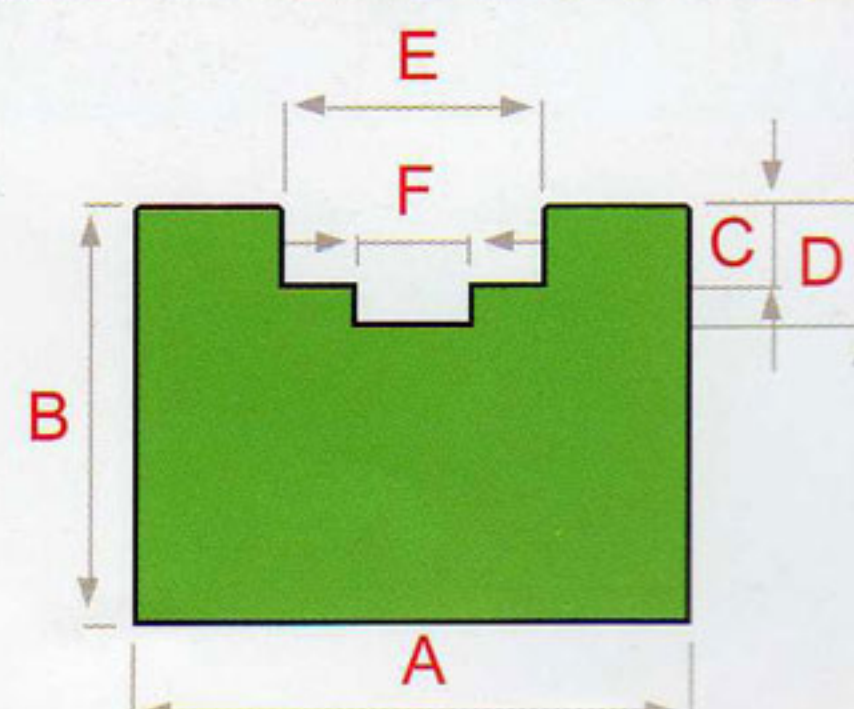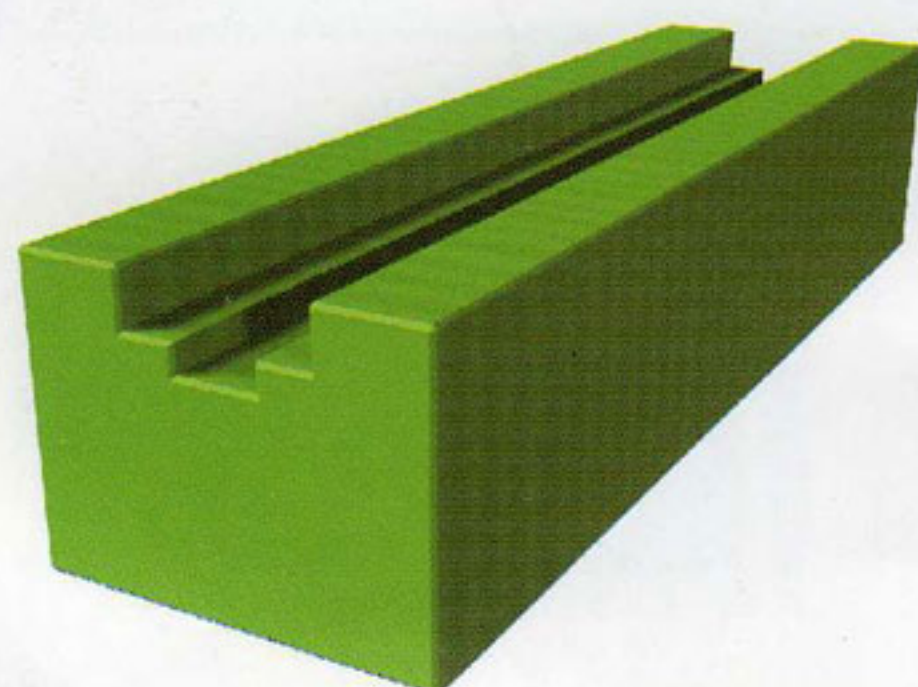

PERFIL EN "UL" PARA CADENA SIMPLE





Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	F	G	H
990060	3/8" * 7/32"	06B1	20	25	5.6	6.6	8.7	10	4	9.3
990061	1/2" * 5/16"	08B1	24	30	7.6	8.7	11.5	12.7	5	12.8
990062	5/8" * 3/8"	10B1	30	35	9.5	10.4	13.5	14.8	6	15.4
990063	3/4" * 7/16"	12B1	40	35	11.5	12.3	15.9	17.5	7	16.9
990064	1" * 17 mm.	16B1	40	45	16.9	16.1	25.7	26.8	9	24.4
990065	1 1/4" * 3/4"	20B1	50	50	19.4	19.3	29.3	31.2	11	27.5
990066	1 1/2" * 1"	24B1	60	60	25.2	25.7	38.2	40.1	16	36.5
990067	1 3/4" * 31 mm.	28B1	70	70	30.8	28.3	46.9	48.9	17	41.5
990068	2" * 31 mm.	32B1	75	75	30.8	29.6	47.3	53	19	44.5

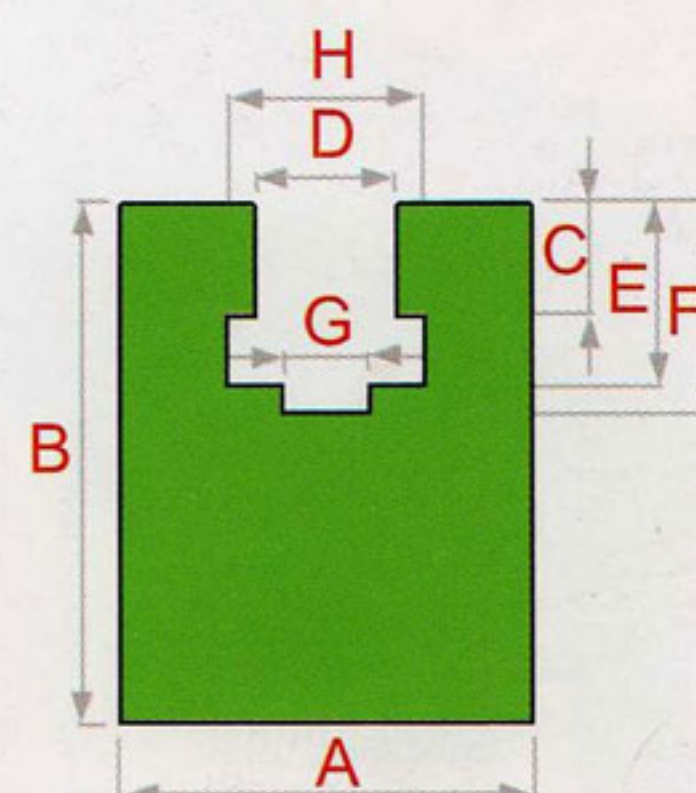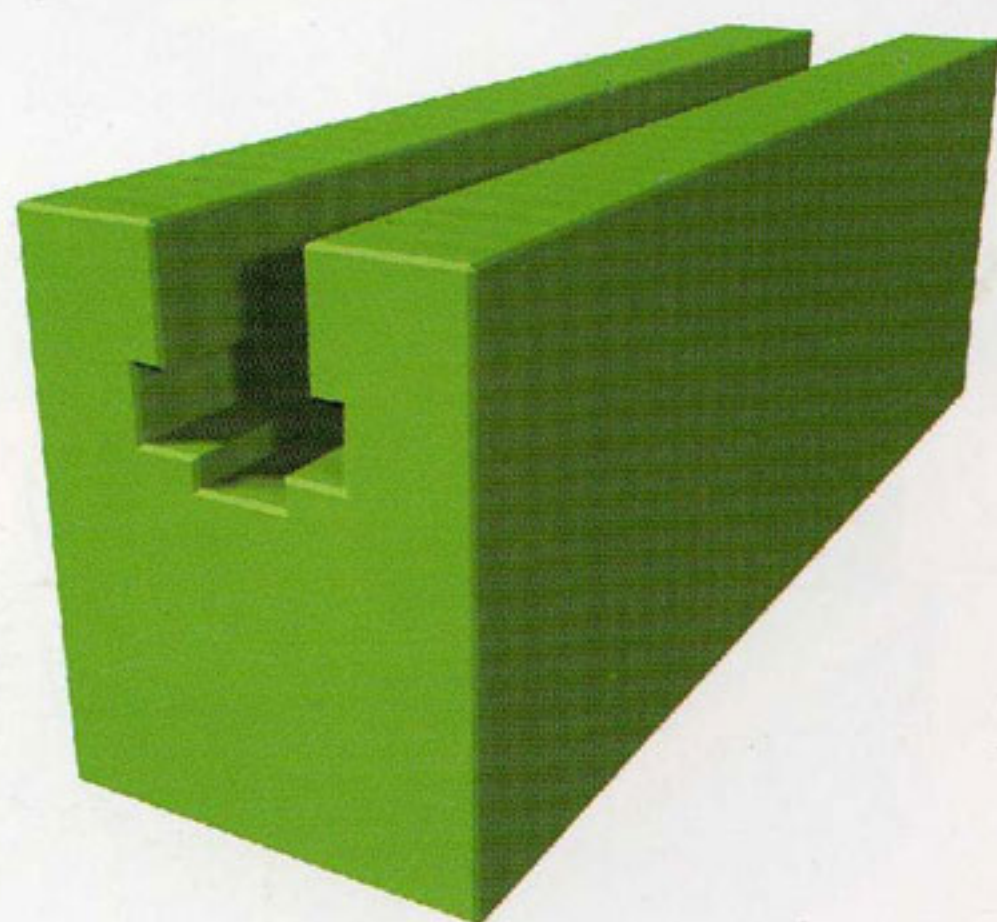

PERFIL EN "MUC" PARA CADENA SIMPLE



Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	Perfil
990091	3/8" * 7/32"	06B1	30	22.5	5.6	6.6	24	C10
990092	1/2" * 3/16"	08B1	30	22.5	7.6	8.7	24	C10
990095	1/2" * 5/16"	08B1	28	22.5	7.6	8.7	16	C5
990097	5/8" * 3/8"	10B1	30	22.5	9.3	10.4	24	C10
990098	3/4" * 7/16"	12B1	30	22.5	11.5	12.3	24	C10
990099	1" * 17 mm.	16B1	45	38	15.3	16.1	40	C11
990100	1 1/4" * 3/4"	20B1	45	38	19.4	19.3	40	C11

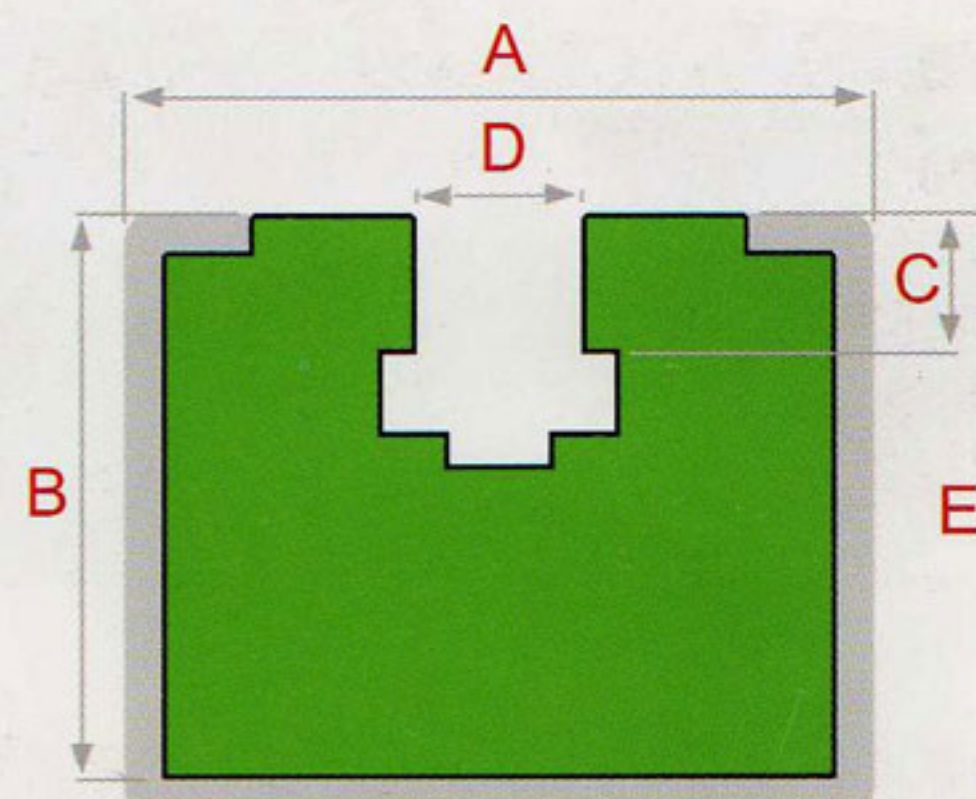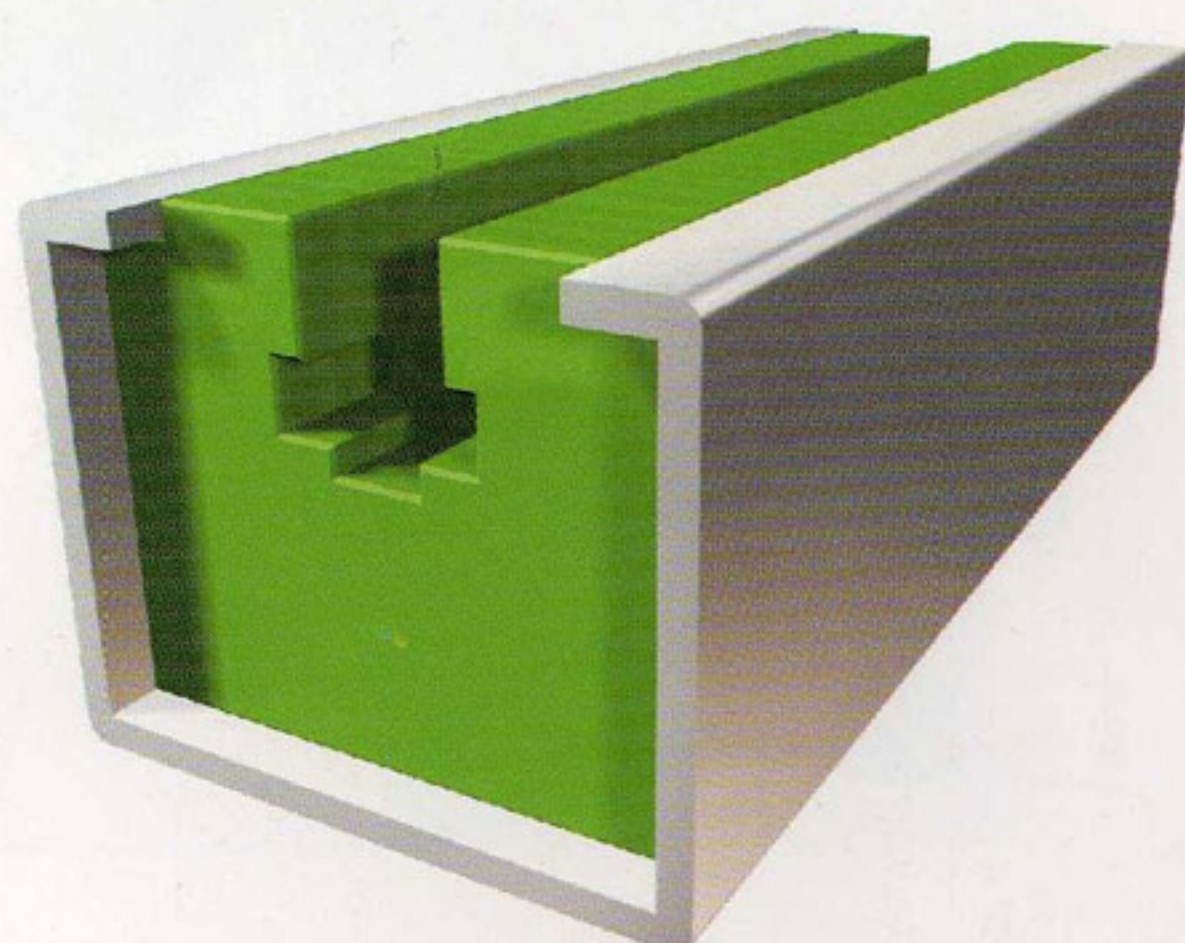

PERFIL EN "MU" PARA CADENA SIMPLE





Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	Perfil
990081	3/8" * 5/32"	06B1	20	10	2.8	15	9.2	C3
990085	1/2" * 5/16"	08B1	25	15	3.5	22	12.7	C5
990087	5/8" * 3/8"	10B1	25	15	3.6	22	15.2	C5
990088	3/4" * 7/16"	12B1	25	20	3.9	27	16.7	C5
990089	1" * 17 mm.	16B1	35	25	8.4	33	24.4	C9

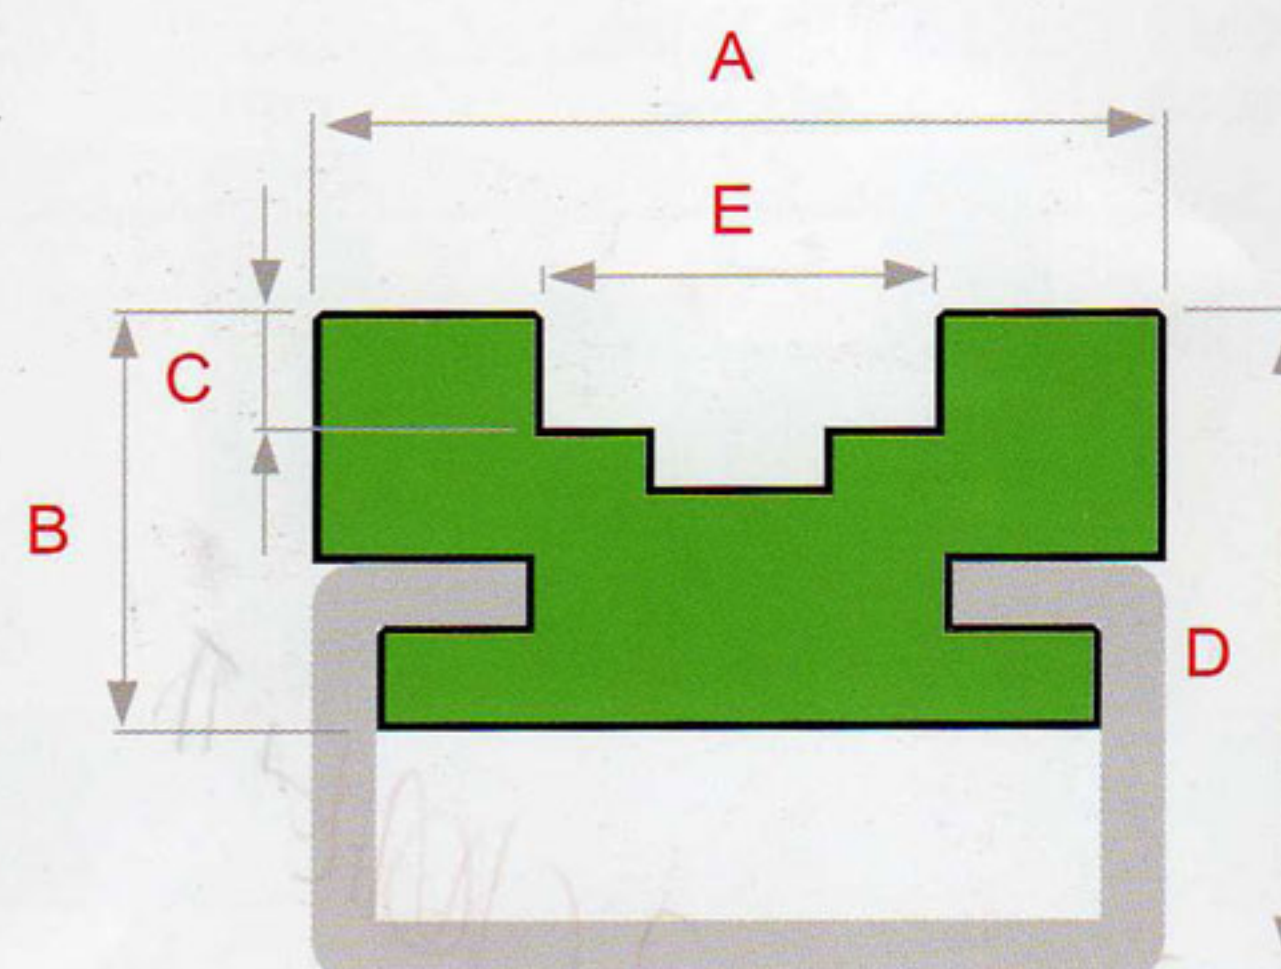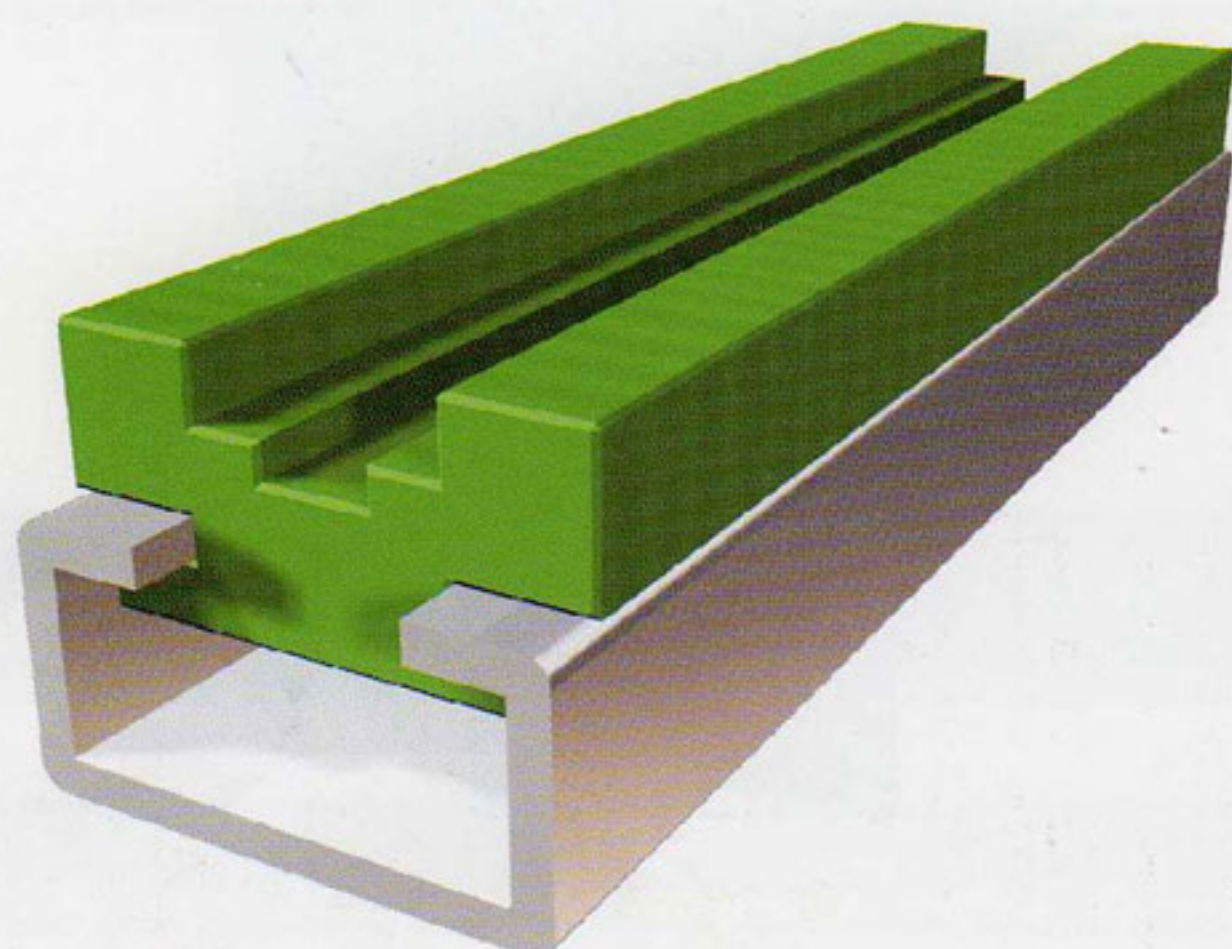

PERFIL EN "MUL" PARA CADENA SIMPLE



Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	F	G	H	I	Perfil
990102	3/8" * 7/32"	06B1	20	17.5	5.6	6.6	21	9.9	8.7	4	9.3	C3
990106	1/2" * 5/16"	08B1	28	27.5	7.6	8.7	32	12.7	11.5	5	12.8	C5
990108	5/8" * 3/8"	10B1	28	27.5	9.3	10.4	32	14.8	13.5	6	15.4	C5
990109	3/4" * 7/16"	12B1	38	34	11.5	12.3	43	17.5	15.9	7	16.9	C9
990110	1" * 17 mm.	16B1	38	40	16.9	16.1	50	26.8	25.7	9	24.4	C9

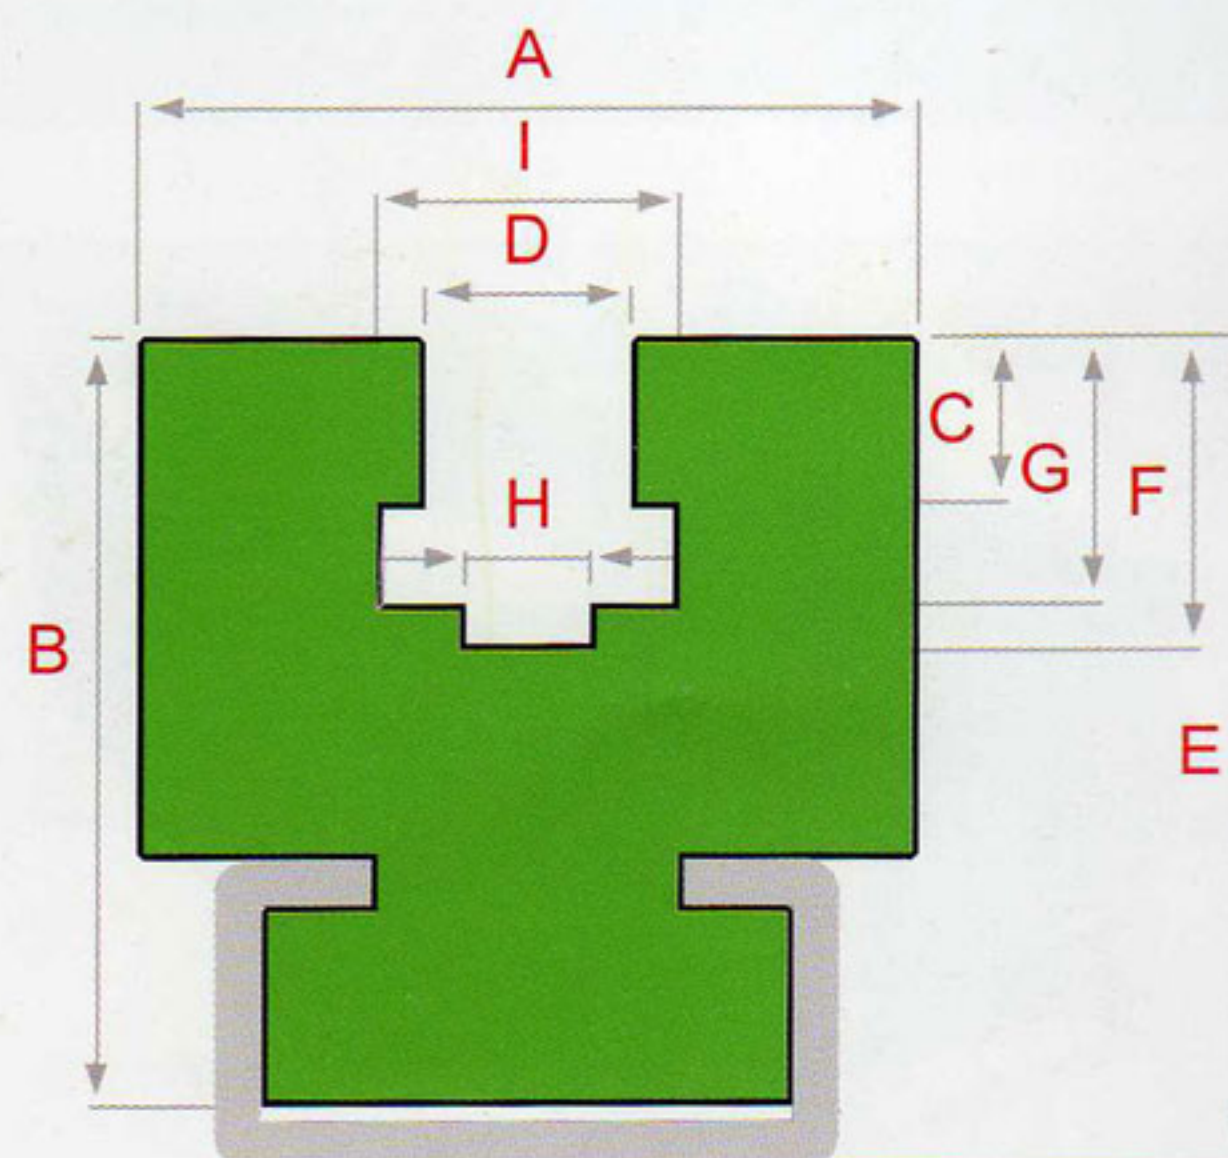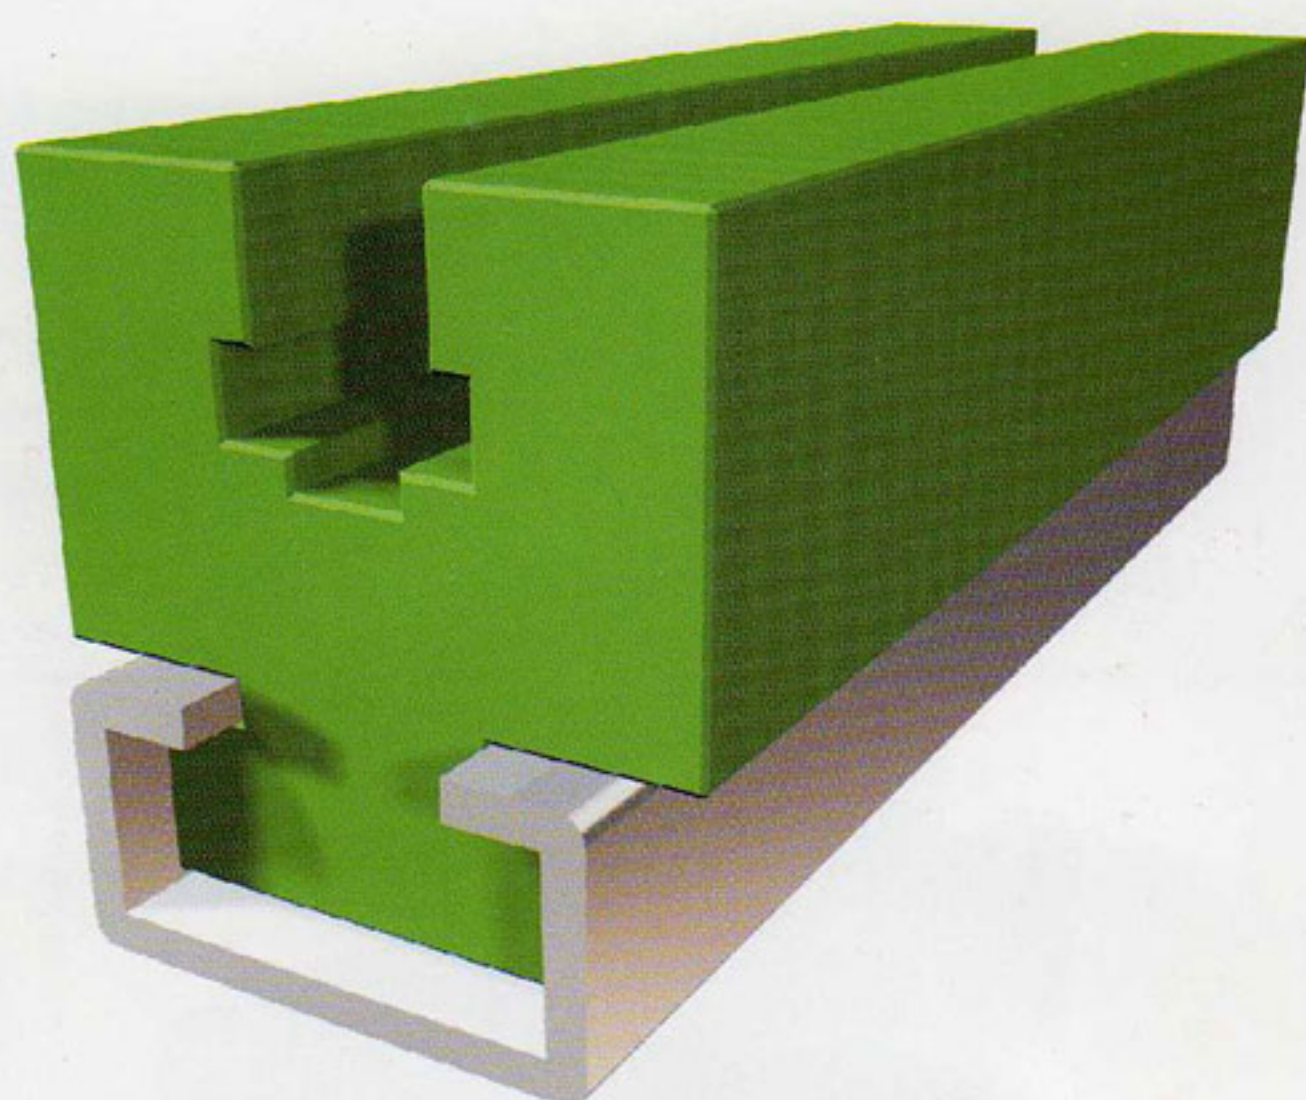

PERFIL EN "MTD" PARA 2 CADENAS SIMPLES





Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	E	F	Perfil
990112	3/8" * 7/32"	06B1	20	26.4	31.6	19.5	28.4	14.5	C3
990113	1/2" * 5/16"	08B1	20	28	34.8	18.9	30.5	16.5	C3
990114	5/8" * 3/8"	10B1	20	34.4	41.1	21.2	36	15.5	C3
990115	3/4" * 7/16"	12B1	28	38.5	47.5	24.8	41.5	18.5	C5
990116	1" * 17 mm.	16B1	38	52.4	69.4	45.1	61.4	25	C9

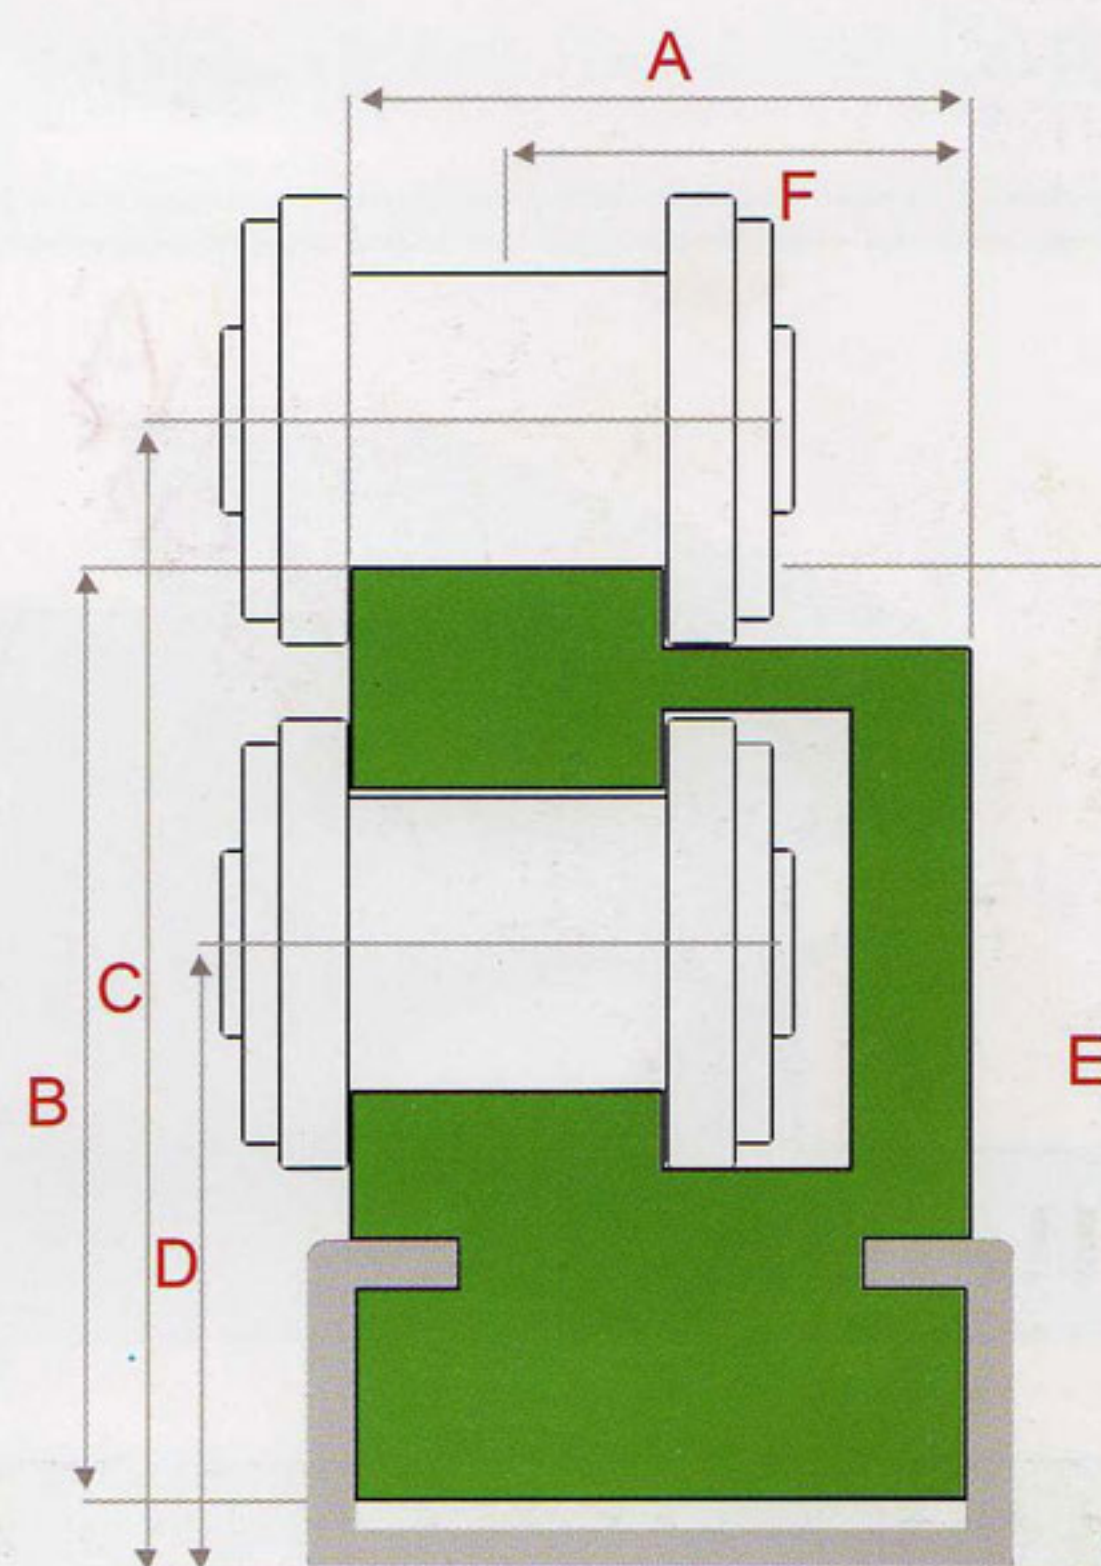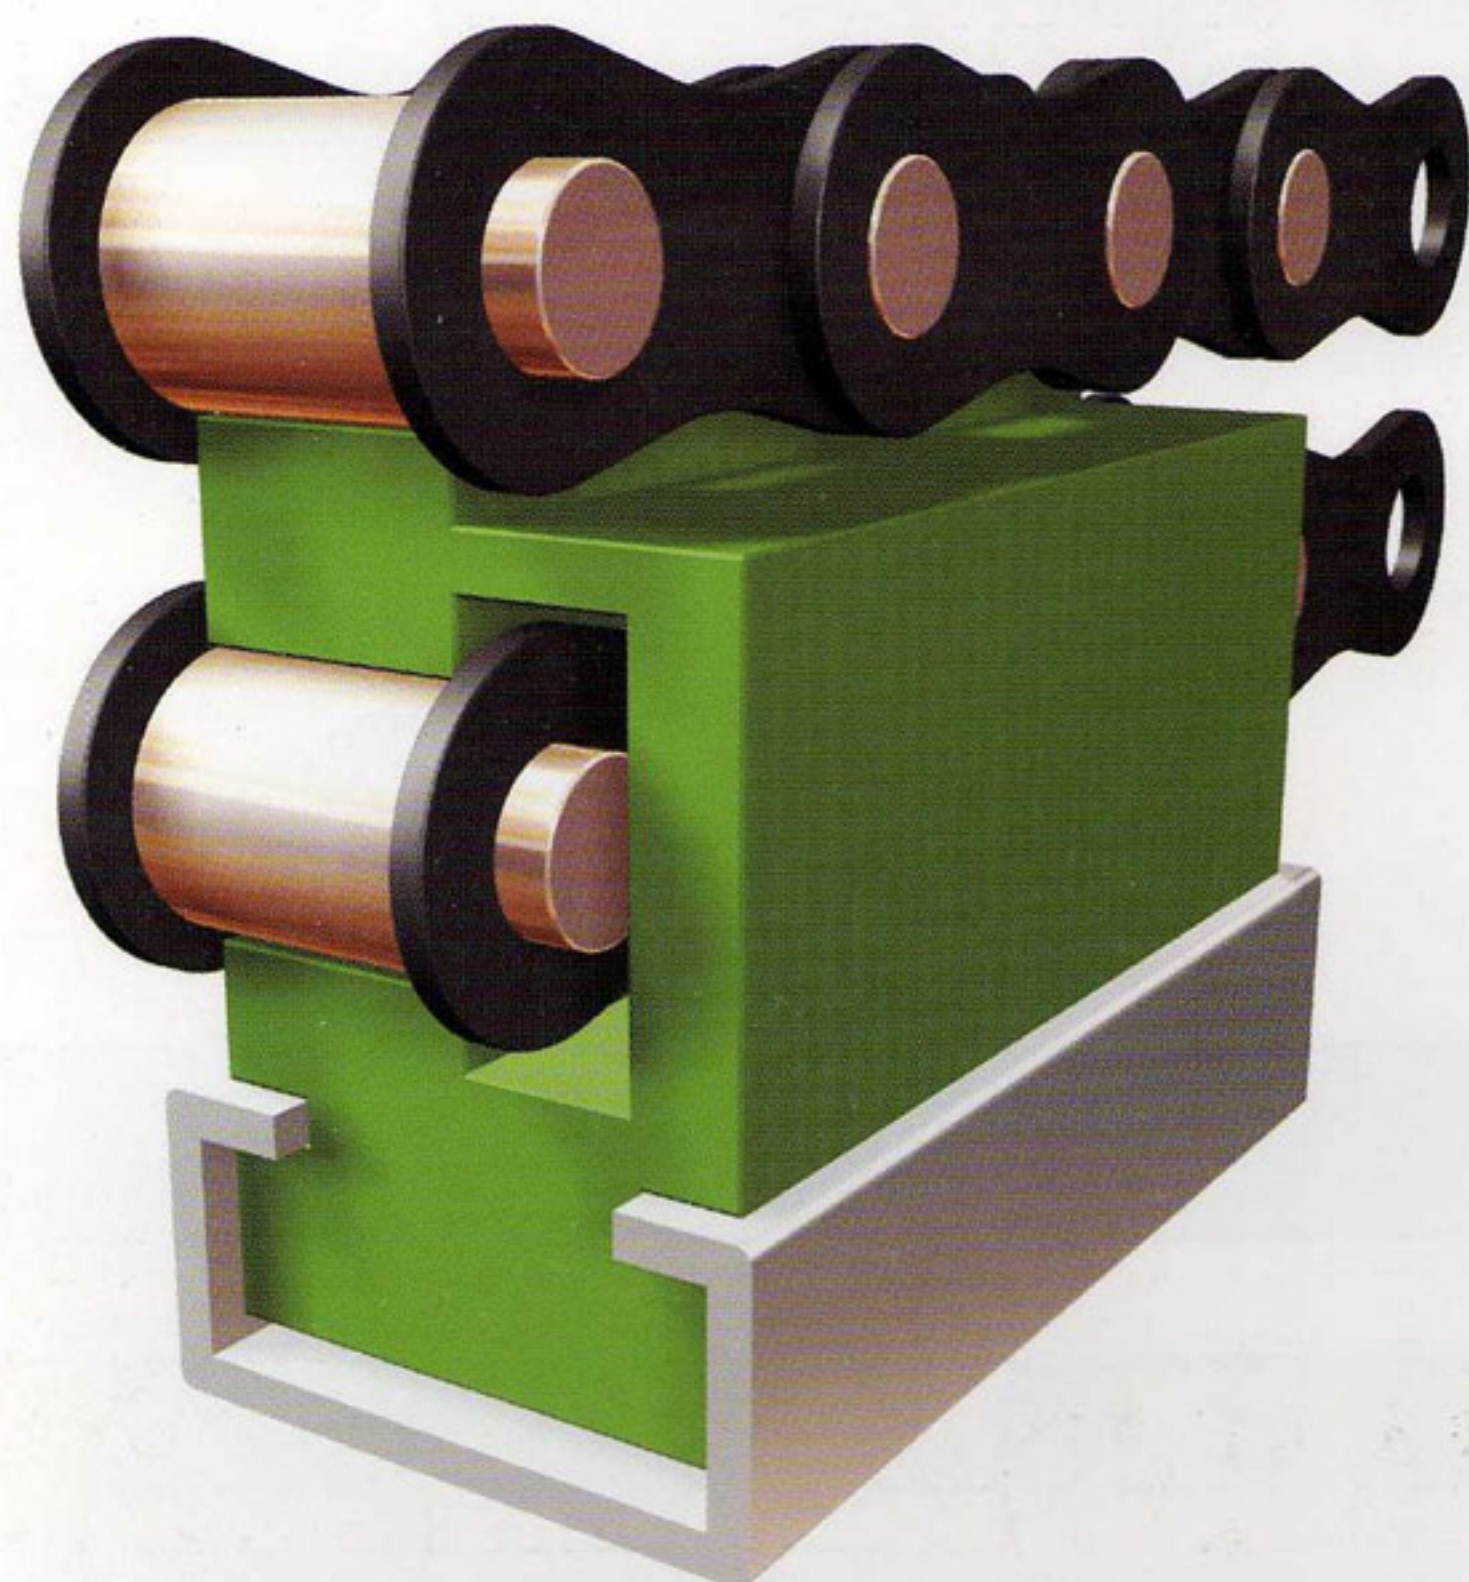

PERFIL PINZA



Referencia: PF06000040

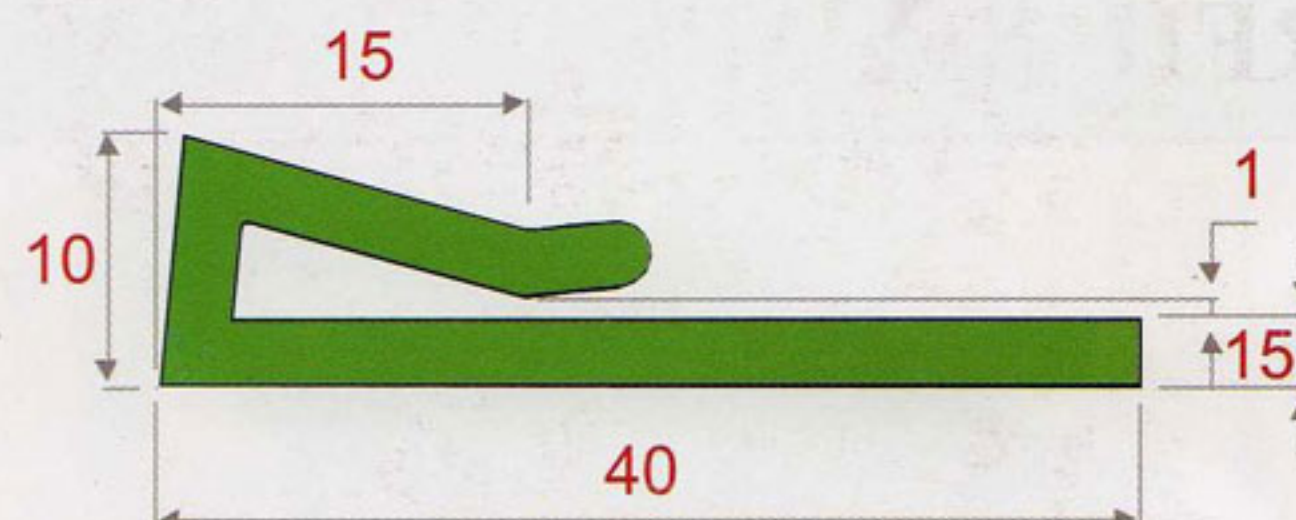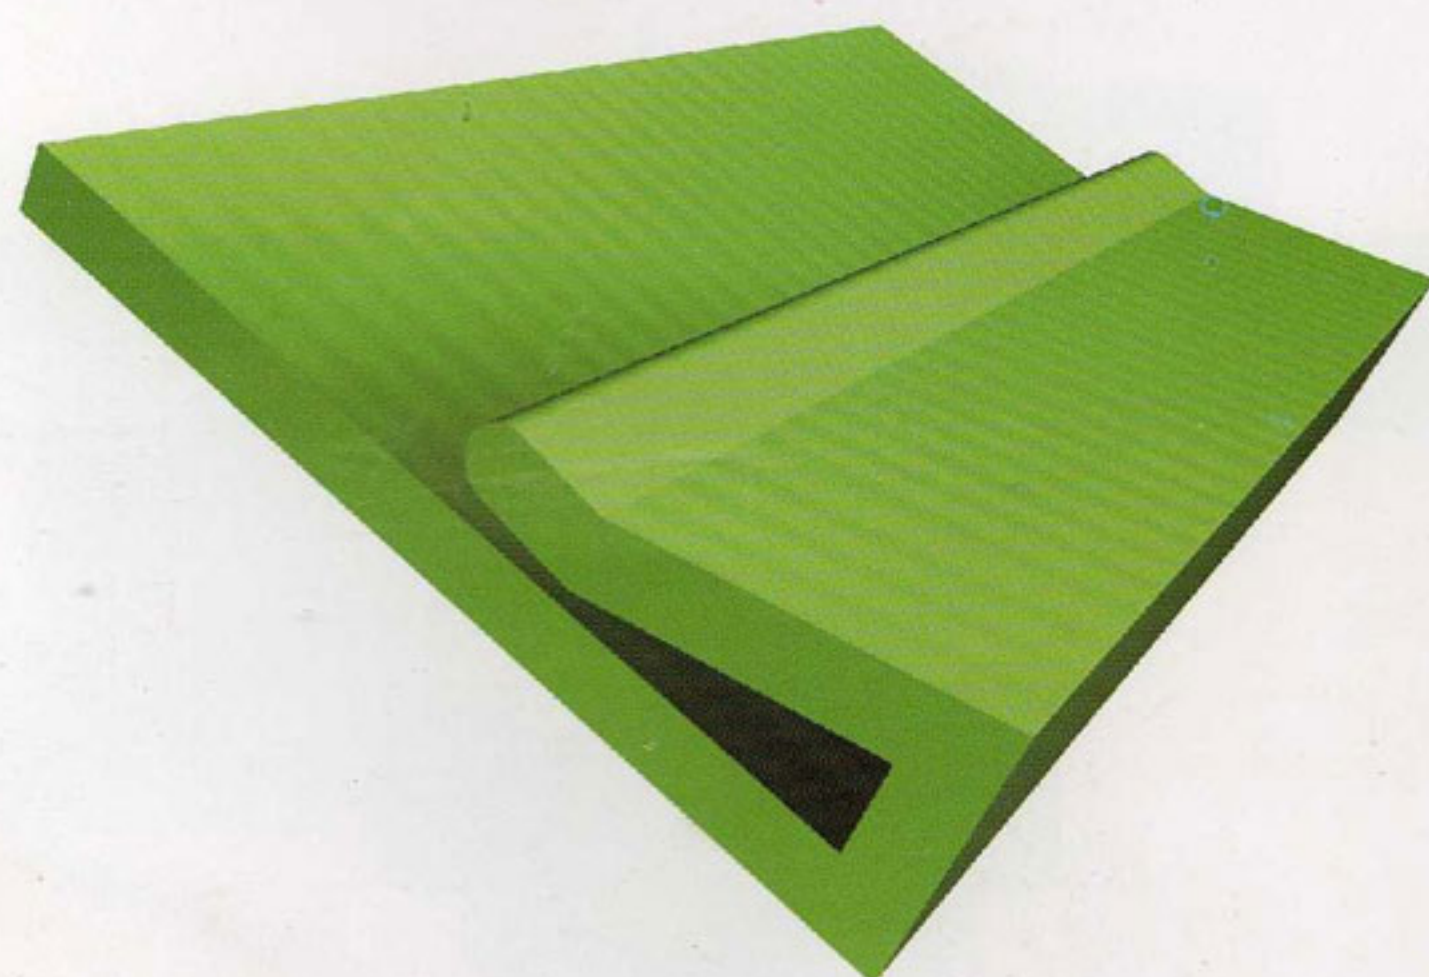

PERFIL EN "MP" PLANO




Referencia	Cadena	Tipo ISO-DIN	A	B	C	D	Perfil
990117	-	-	20	10	4	14	C3
990118	-	-	20	15	7	17	C3
990119	-	-	20	20	12	22	C3
990120	-	-	28	10	3	15	C5
990121	-	-	28	15	6	18	C5
990122	-	-	28	20	12	24	C5
990123	-	-	38	12	4	22	C9
990124	-	-	38	15	6	24	C9
990125	-	-	38	20	12	30	C9

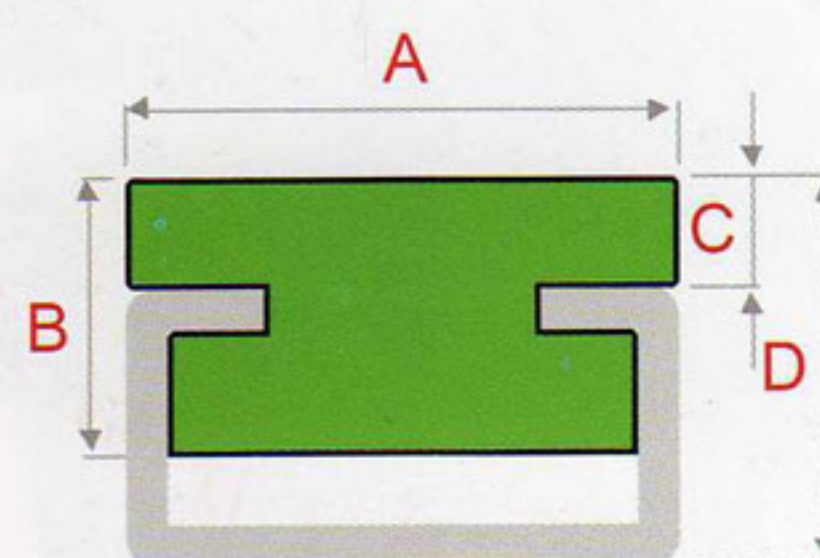
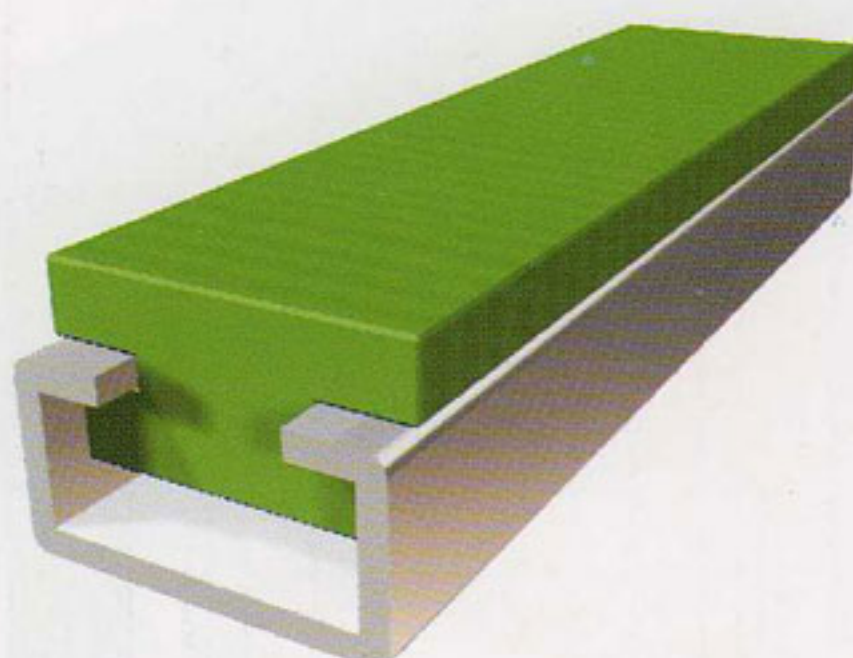


PERFIL "BP"

Tipo	A	B	C	D
990142	24	12	2,0	16
990143	29	12	2,0	21
990144	34	12	2,0	26
990145	39	14	2,5	31

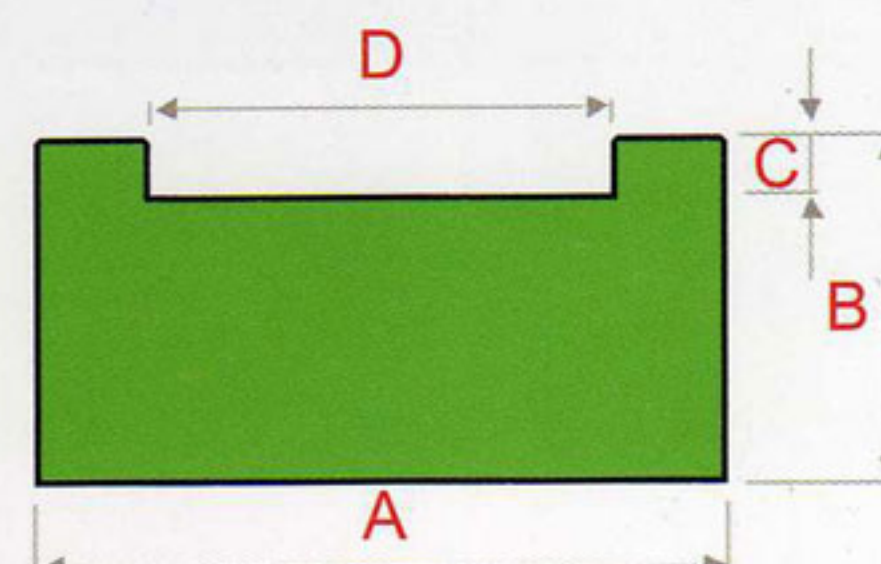



PERFIL "BPM"

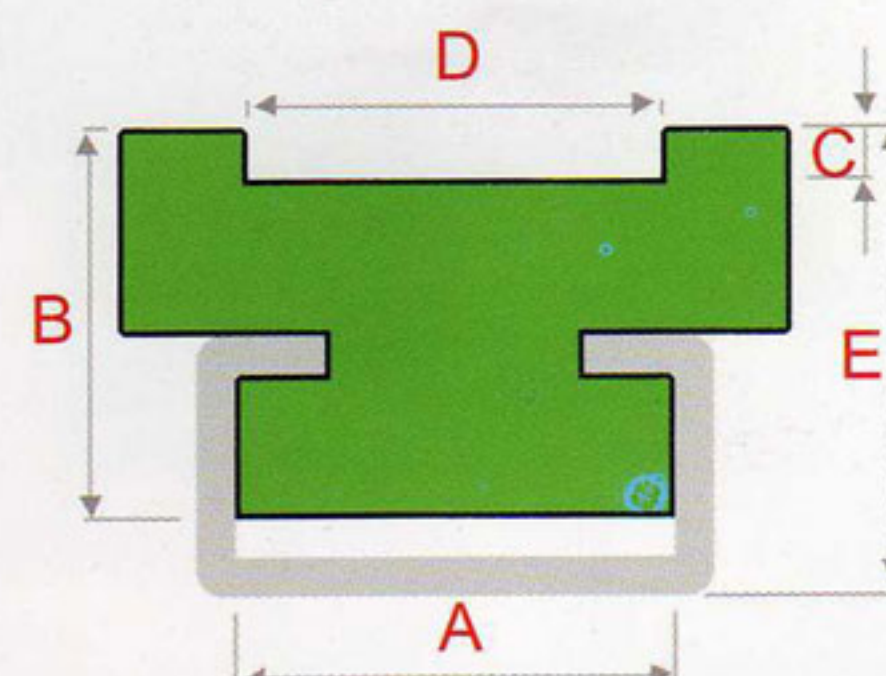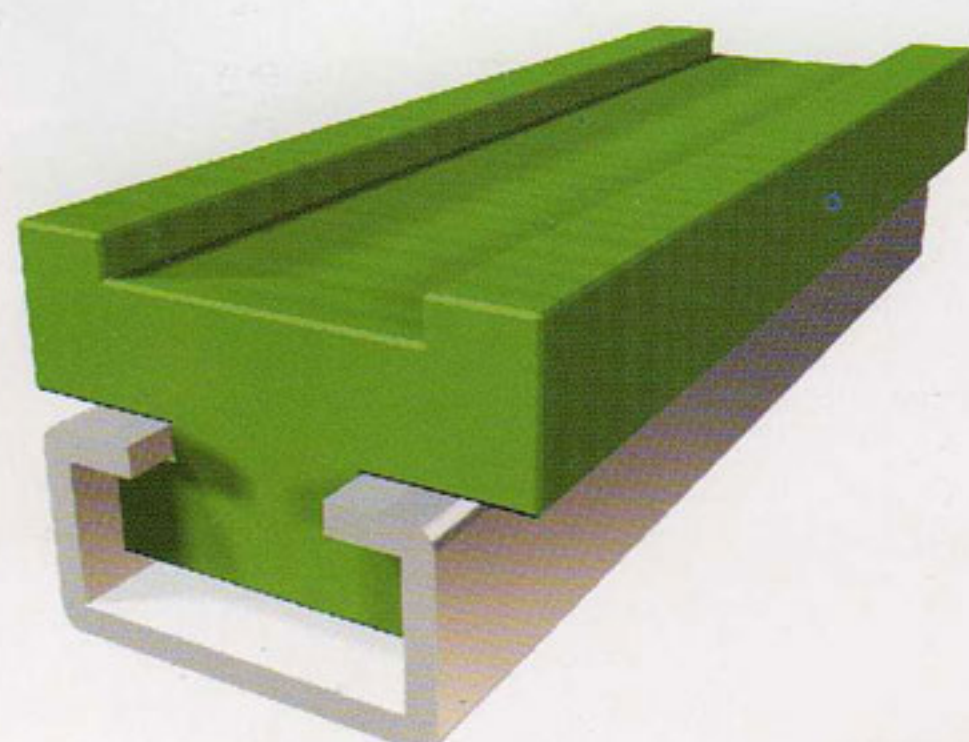



PERFILES PARA CORREAS REDONDAS



Referencia	A	B	C	Ø
990126	15	10	2	4
990127	15	10	2.5	5
990128	20	10	3	6
990129	20	10	4	8
990130	25	12	5	10
990131	25	12	6	12
990132	25	15	7.5	15
990133	30	20	10	20

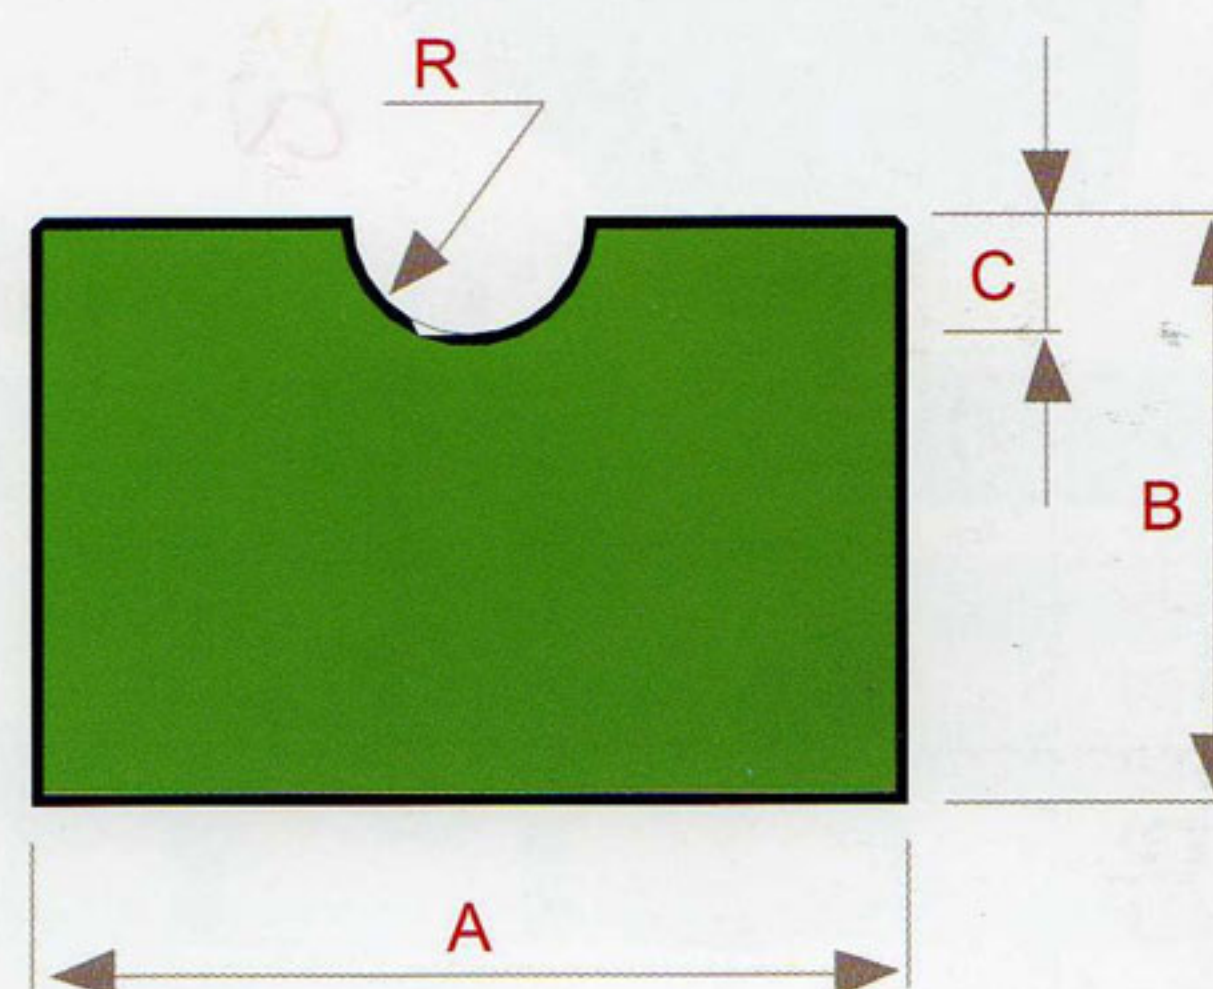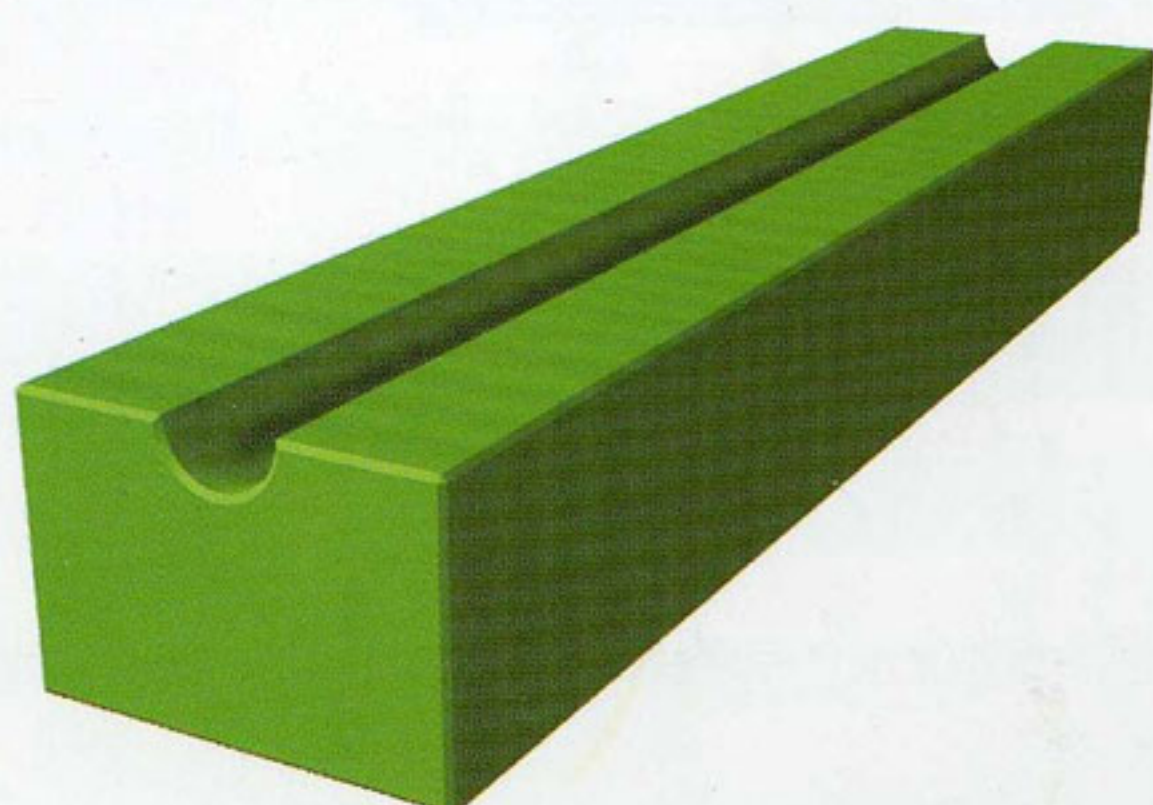



Referencia	A	B	C	D	Ø	Perfil
990134	20	10	2	14	4	C3
990135	20	10	2.5	14	5	C3
990136	20	10	3	14	6	C3
990137	20	10	4	14	8	C3
990138	28	15	5	18	10	C5
990139	28	15	6	18	12	C5
990140	28	15	7.5	18	15	C5
990141	28	20	10	24	20	C5

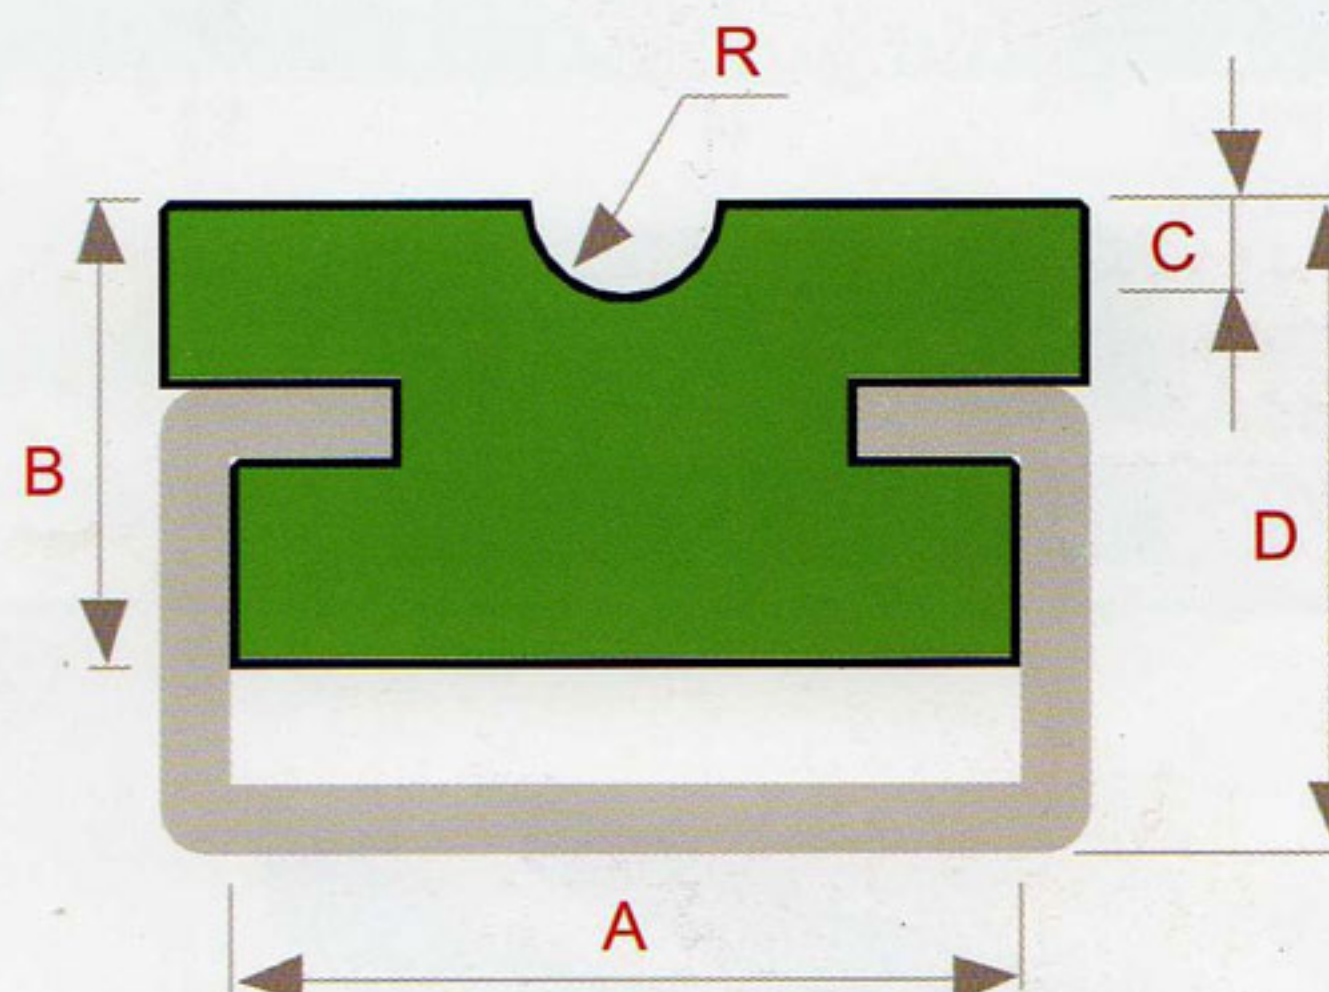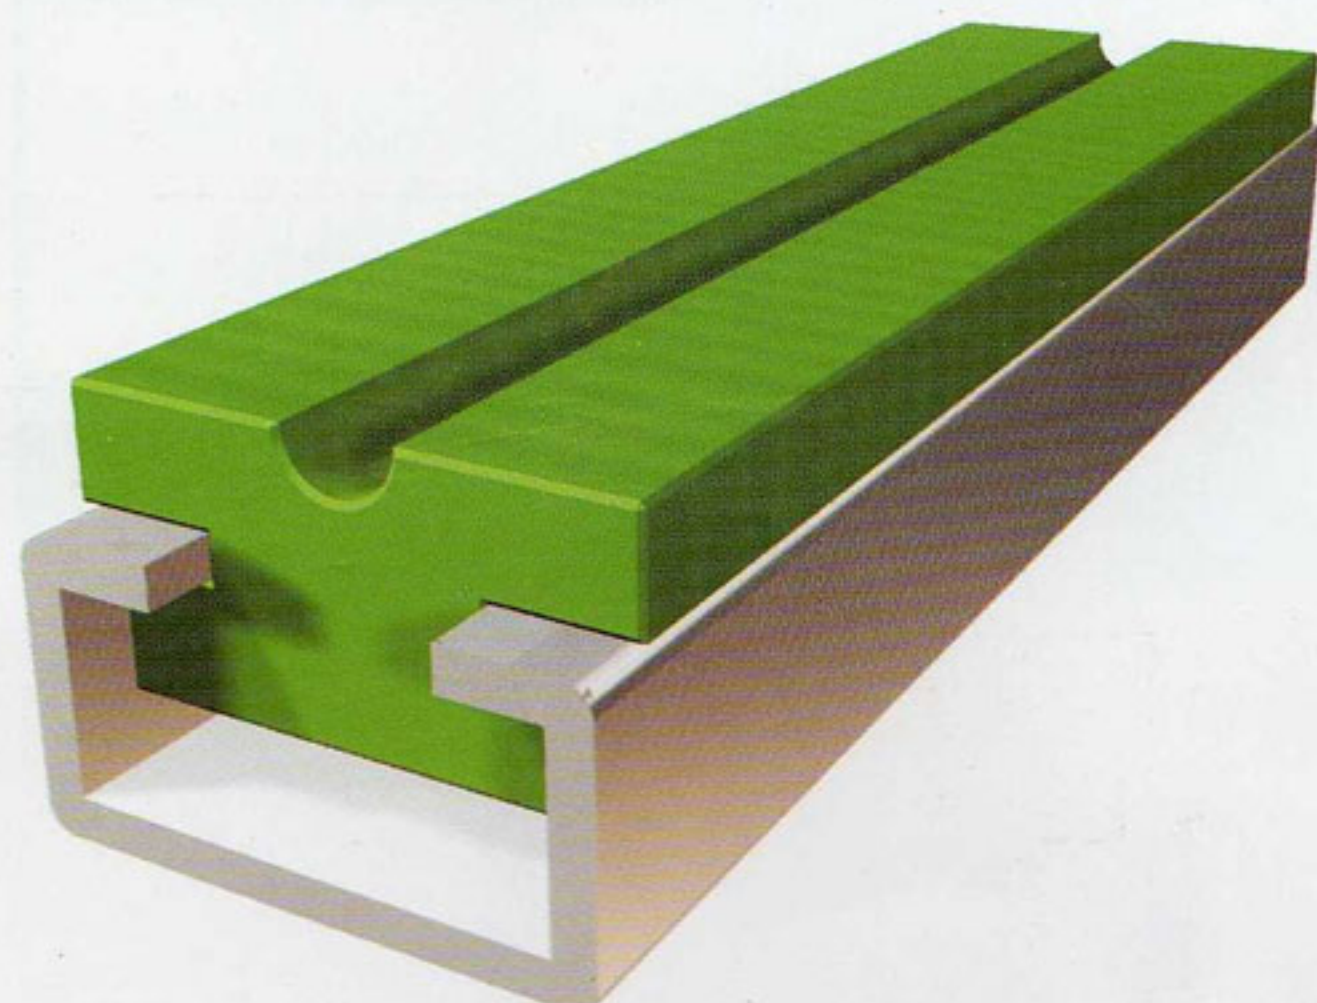



PERFIL PARA CORREA TRAPEZOIDAL



Tipo	Clase	A	B	C	D	E	F
990152	Z	20	10	3	6.5	-	ar
990153	A	20	12	5	8	-	ar
990154	E	25	12	5	10	-	ar
990155	B	30	15	8	10.5	-	ar
990156	C	35	20	11	13.5	-	ar
990151	D	40	25	13	19	-	ar

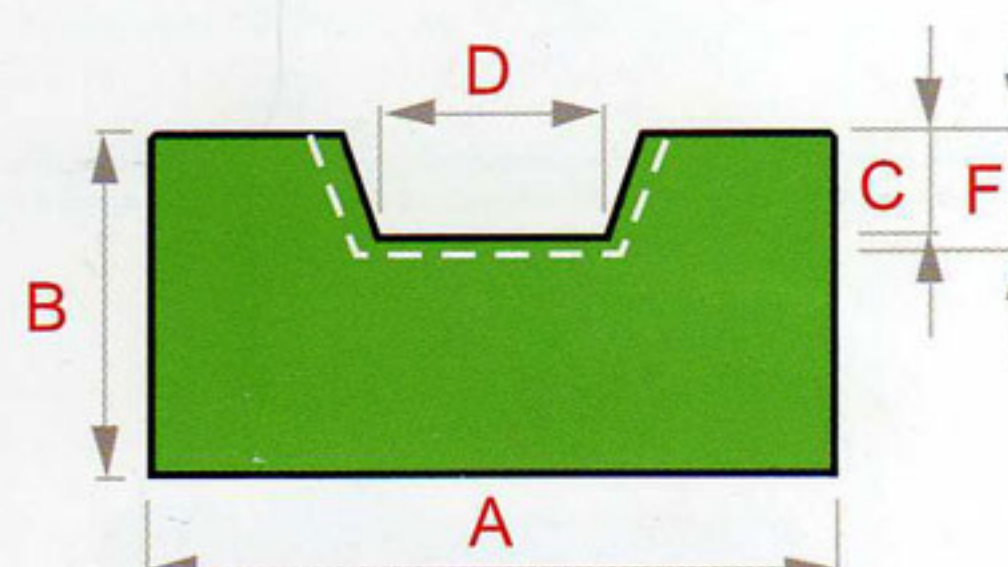
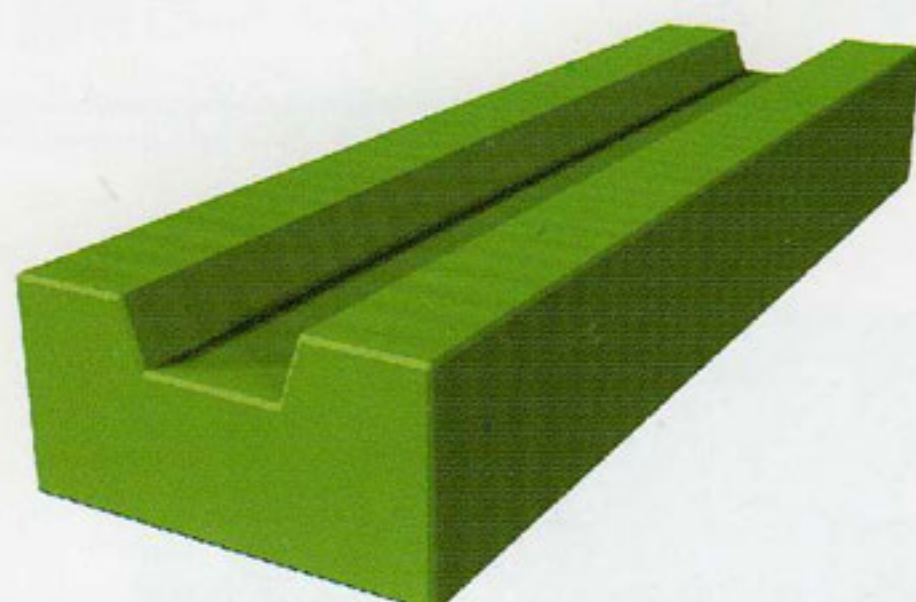


Tipo	Clase	A	B	C	D	E	F	Tipo
990157	Z	20	15	3	6.5	17	ar	C3
990158	A	20	15	5	8	17	ar	C3
990159	E	25	20	5	10	24	ar	C5
990169	B	30	20	8	10.5	24	ar	C5
990170	C	38	25	11	13.5	32	ar	C9
990171	D	40	30	13	19	35	ar	C10

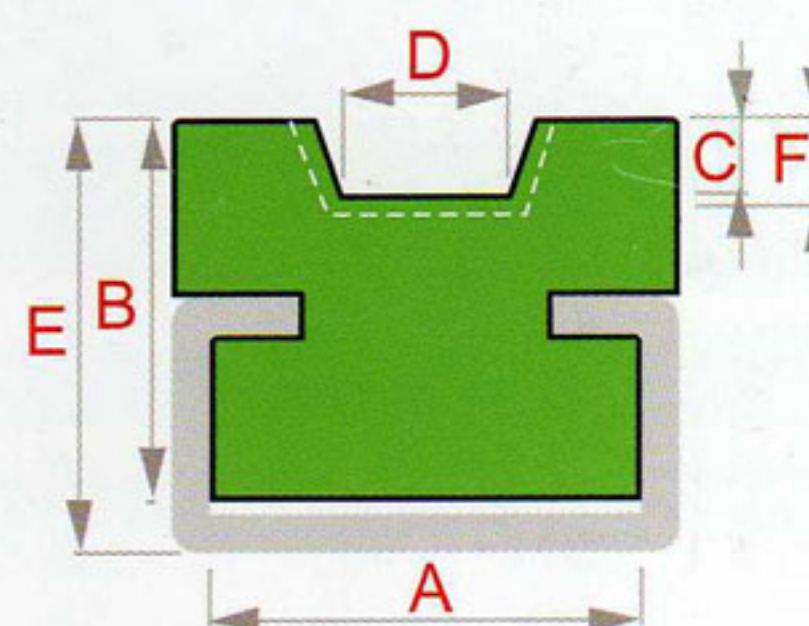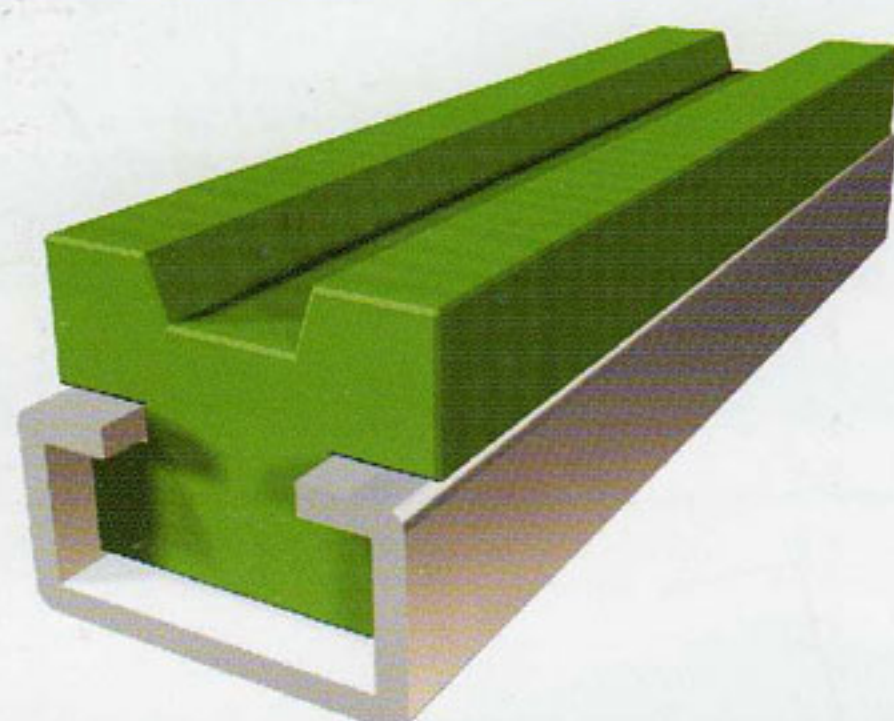

PERFILES METÁLICOS



Referencia	A	B	C	D	Perfil
990161	24	5.2	17.5	1.5	C1
990162	20	10	10	1.5	C3
990163	28	12	14	1.5	C5
990164	38	18	22	1.5	C9
990165	30	24	20	1.5	C10
990166	45	40	31	1.5	C11

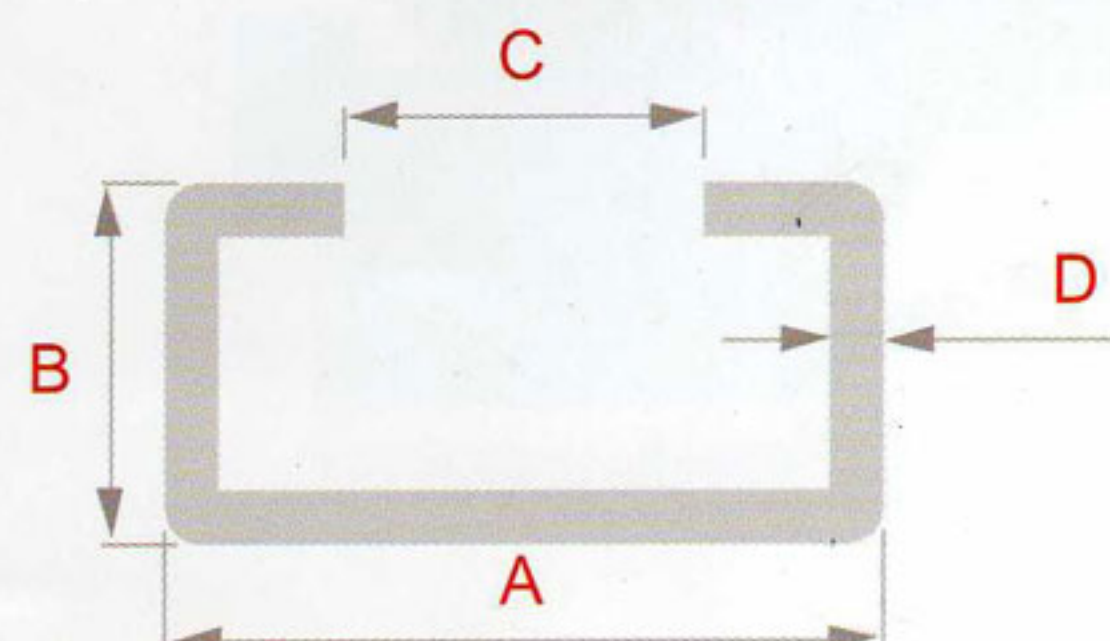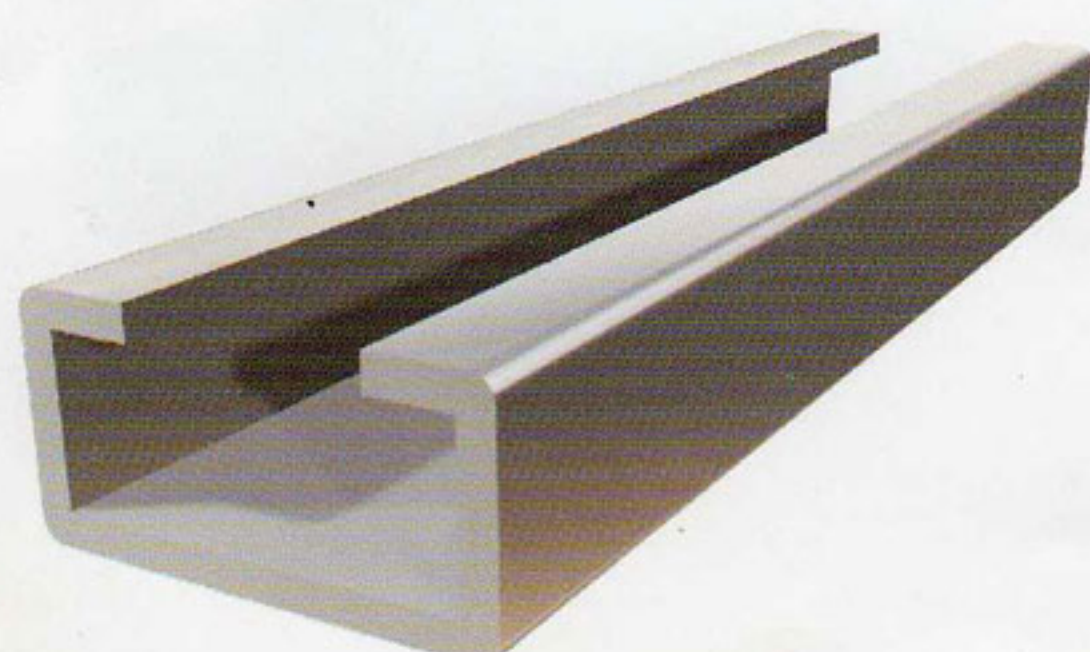

CURVAS CÓNICAS PARA CADENA DE PLATILLOS DE GIRO LATERAL



Referencia	R1	R2	R3	R4	P	AG
Cadena 82,5 mm.						
C15001	500	-	-	-	-	100
C15002	500	590	-	-	90	190
C15003	500	590	680	-	90	280
C15004	500	590	680	770	90	370
C16501	650	-	-	-	-	100
C16502	650	740	-	-	90	190
C16503	650	740	830	-	90	280
C16504	650	740	830	920	90	370
C18601	860	-	-	-	-	100
C18602	860	950	-	-	90	190
C18603	860	950	1040	-	90	280
C18604	860	950	1040	1130	90	370
Cadena 114,3 mm.						
C25501	550	-	-	-	-	130
C25502	550	675	-	-	125	255
C25503	550	675	800	-	125	380
C25504	550	675	800	925	125	505
C26501	650	-	-	-	-	130
C26502	650	775	-	-	125	255
C26503	650	775	900	-	125	380
C26504	650	775	900	1025	125	505

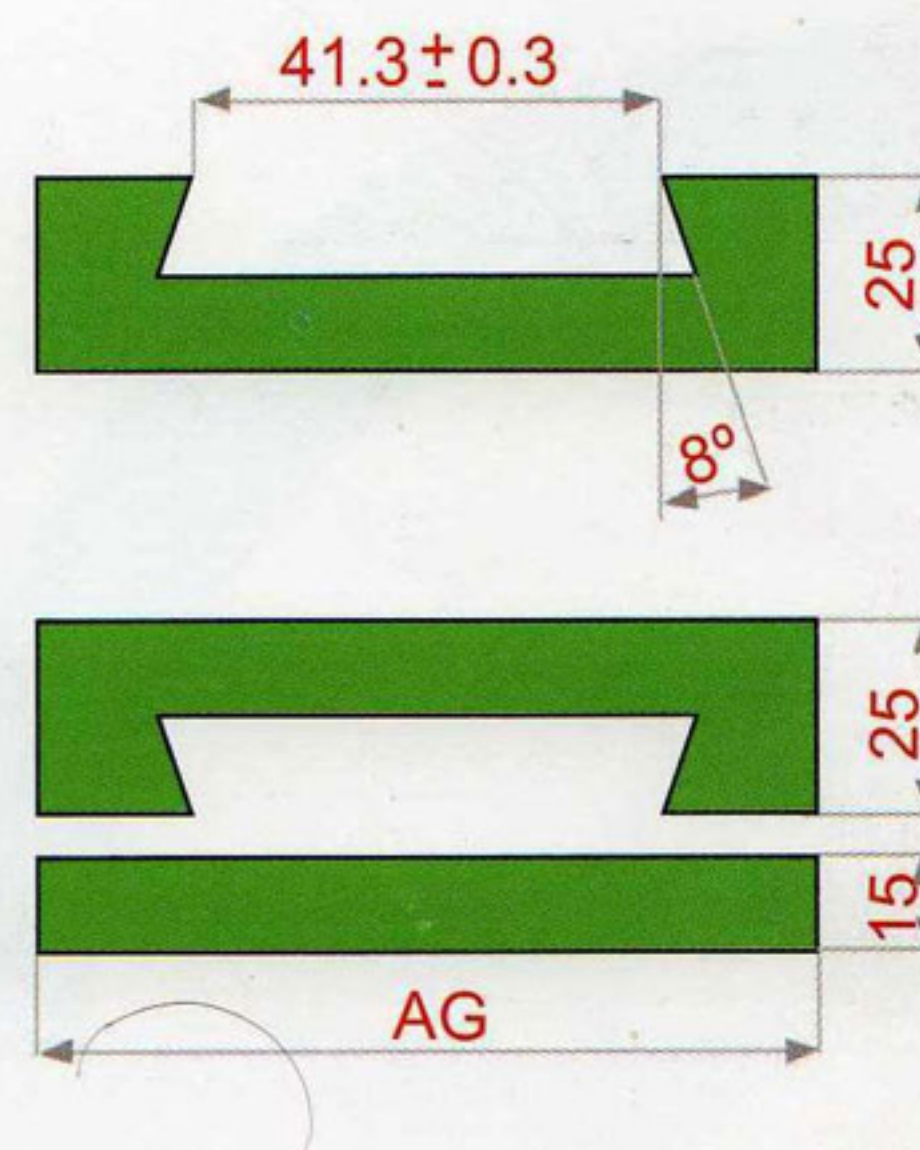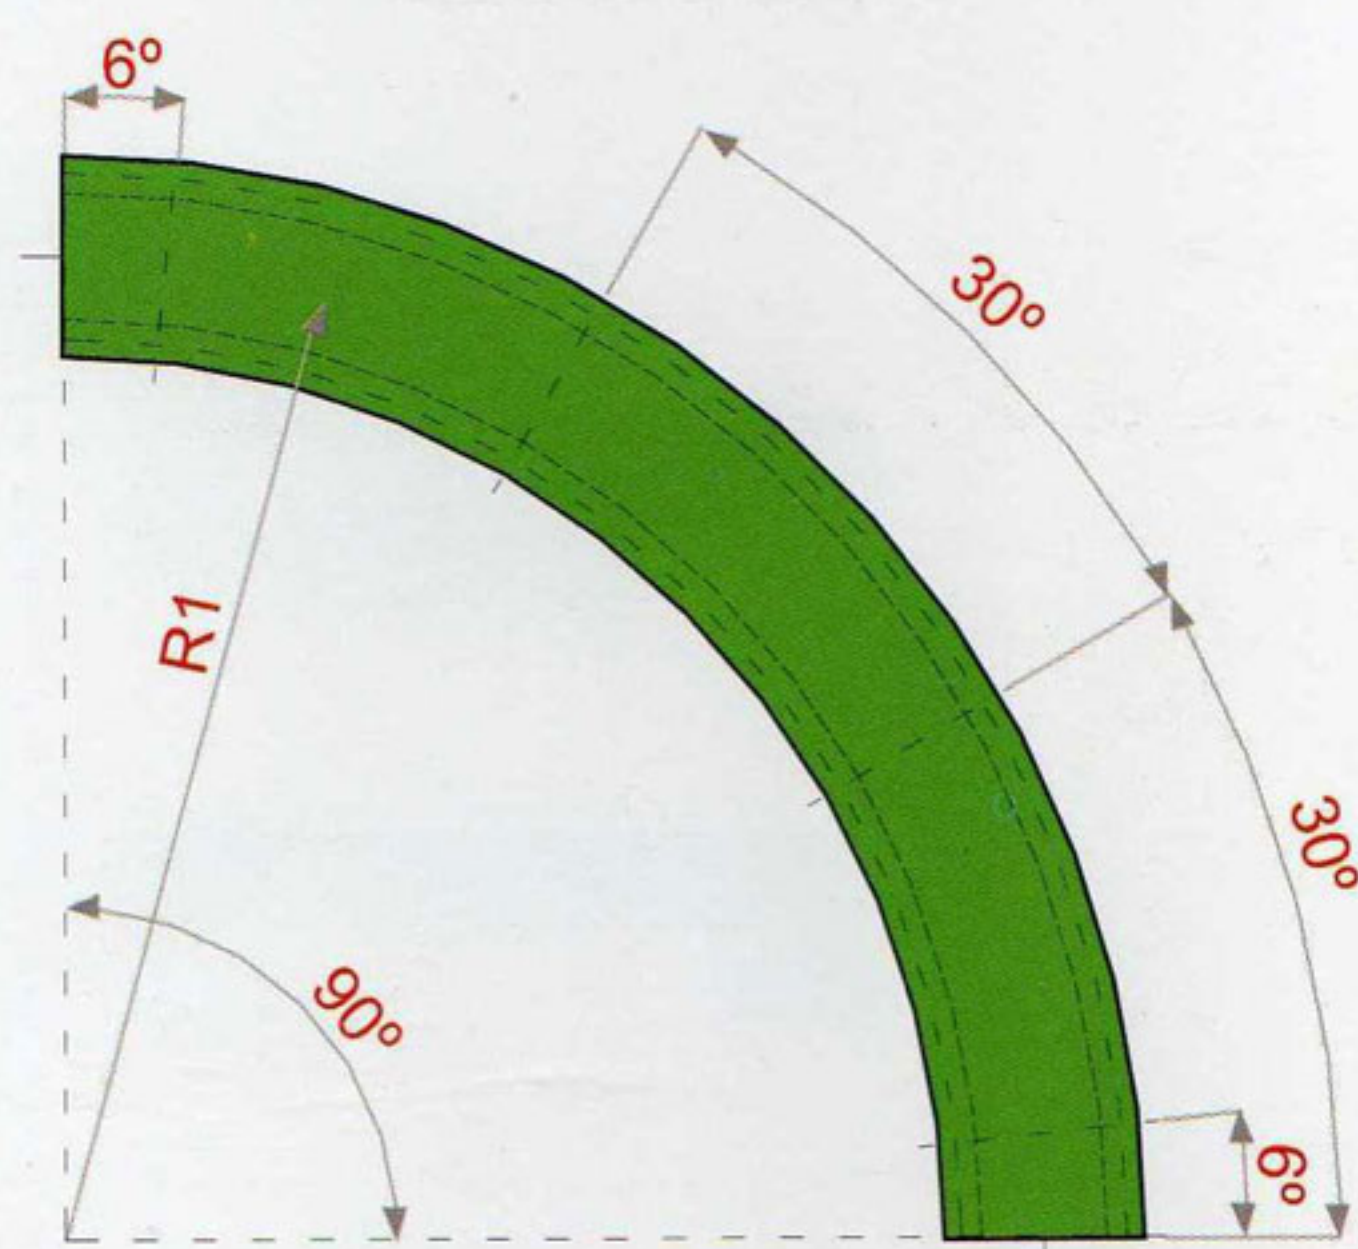

CURVAS TAB PARA CADENA DE PLATILLOS DE GIRO LATERAL



Referencia	R1	R2	R3	R4	P	AG
Ancho de platillo 82,5 mm						
OR15001	500	-	-	-	-	100
OR15002	500	590	-	-	90	190
OR15003	500	590	680	-	90	280
OR15004	500	590	680	770	90	370
OR16501	650	-	-	-	-	100
OR16502	650	740	-	-	90	190
OR16503	650	740	830	-	90	280
OR16504	650	740	830	920	90	370
OR18601	860	-	-	-	-	100
OR18602	860	950	-	-	90	190
OR18603	860	950	1040	-	90	280
OR18604	860	950	1040	1130	90	370
Ancho de platillo 114,3 mm						
OR25501	550	-	-	-	-	130
OR25502	550	675	-	-	125	255
OR25503	550	675	800	-	125	380
OR25504	550	675	800	1025	125	505
OR26501	650	-	-	-	-	130
OR26502	650	775	-	-	125	255
OR26503	650	775	900	-	125	380
OR26504	650	775	900	1025	125	505

